



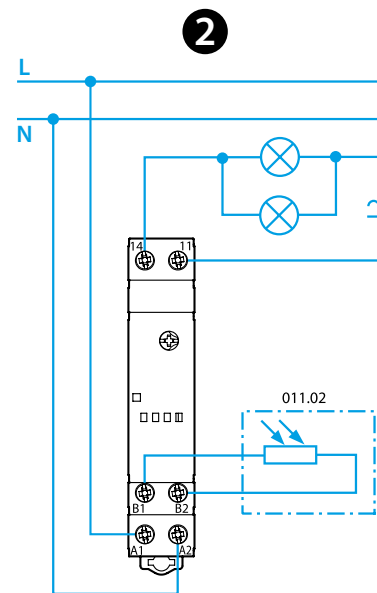

11.31

EN 60669-1 / EN 60669-2-1										
	11.31.8.230.0000 U_N (110...230)V AC (50/60 Hz) U_{min} 90 V AC U_{max} 265 V AC									
	11.31.0.024.0000 U_N 12...24 V AC (50/60 Hz) / DC $U_{min-max}$ 10.2...28.8 V AC $U_{min-max}$ 10.2...32 V DC									
P 2.5 VA (50 Hz) / 0.9 W										
	1 NO (SPST-NO) 16 A 250 V AC μ									
	<table border="0"> <tr> <td>AC1</td> <td>4000 VA</td> </tr> <tr> <td>AC15 (230 V AC)</td> <td>750 VA</td> </tr> </table>	AC1	4000 VA	AC15 (230 V AC)	750 VA					
AC1	4000 VA									
AC15 (230 V AC)	750 VA									
<table border="0"> <tr> <td></td> <td>(230 V AC)</td> <td>2000 W</td> </tr> <tr> <td></td> <td>(230 V AC)</td> <td>750 W</td> </tr> <tr> <td></td> <td>(230 V AC)</td> <td>400 W</td> </tr> </table>			(230 V AC)	2000 W		(230 V AC)	750 W		(230 V AC)	400 W
	(230 V AC)	2000 W								
	(230 V AC)	750 W								
	(230 V AC)	400 W								
IP20										

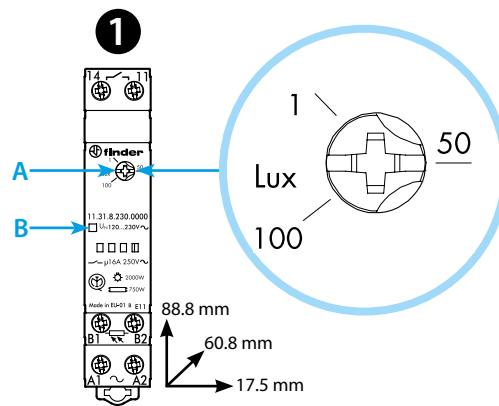

ENGLISH

11.31 MODULAR LIGHT DEPENDENT RELAY

- 1 FRONT VIEW**
 - A Lux level setting
 - B LED
- 2 CONNECTION DIAGRAM**
- 3 IMPORTANT FOR INSTALLATION**

The relay must be installed in a protective panel. It is recommended to install the photosensor such that the light emitted from the controlled lamp(s) does not influence the sensor. Also, avoid light interference due, for example, to car beams, neon signs etc. The photocell must be installed vertically in a place where it can be activated by sunlight only.




TESTING

Over the first 3 working cycles the On and Off delay times are reduced to zero in order to aid installation. The packaging can be used to darken the photocell in order to test or regulate the relay.

NOTE

35 mm rail mount (EN 60715)
 011.02: - Photosensor IP54. Cable: \varnothing (7.5...9) mm
 - Cable suggested: H07RN-F (2x1.5 mm²)
 Maximum cable length relay to light sensor: 50 m. (2x1.5 mm²)

(1...100) lx	(-20...+50)°C
$T_{ON} = 15$ s	$T_{OFF} = 30$ s

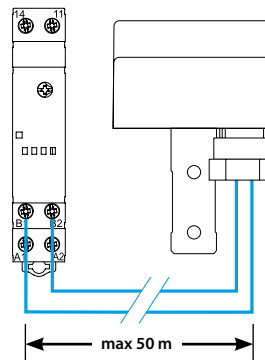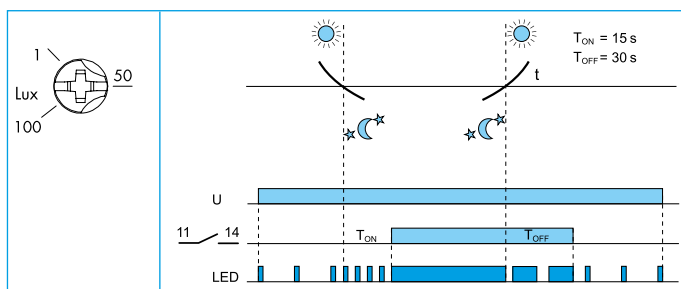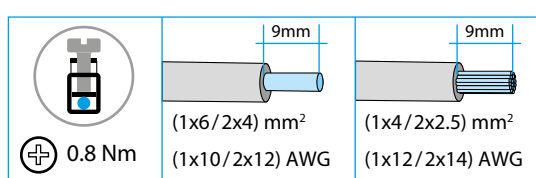

3

