

Think Automation and beyond...



HE2G Grip Switch



New compact, light-weight grip switch provides a comfortable hold

An HE2B enabling switch, compliant with IEC/EN60947-5-8, is installed inside the HE2G grip switch.

**The world's
smallest and lightest
in its class!**






UL pending

Variation

Select from a wide variety of models


Equipped with different control units for various use.

<p>•HE2G-21SHE-L-L</p> <p>Emergency Stop Switch XA1E-BV3U02R</p>  <p>A: Momentary Pushbutton (white) AB6M-M2PLW B: Momentary Pushbutton (white) AB6M-M2PLW</p>	<p>•HE2G-21SHE-L-K</p> <p>Emergency Stop Switch XA1E-BV3U02R</p>  <p>A: Momentary Pushbutton (white) AB6M-M2PLW B: Key Selector AS6M-2KT2PA</p>	<p>•HE2G-21SHE-P-0</p> <p>Emergency Stop Switch XA1E-BV3U02R</p>  <p>C: Pilot Light (green) UP9P-2498G</p>
---	--	---

Internal connector and solder terminals available

Choice of wire-saving internal connectors or solder terminal connections.

Internal Connector



Solder Terminal



Design

Compact design fits comfortably in the hand

The curved grip and small-size makes operation comfortable. The light-weight (approx. 140g, HE2G-21SH) and compact size is suitable for operators with small hands and for use in tight working environments.



Light operating force ensures worry-free operation

The operating force required to shift from position 1 (contact OFF) to position 2 (contact ON) is reduced by 50% compared with IDEC's HE1G grip switch. Less operating force ensures worry-free operation.


3-position switch with distinctive tactile feedback

Tactile clicking feedback allows easy recognition of switch operation when shifting from position 1 (contact OFF) to position 2 (contact ON).

Safety

Dual enabling contacts ensure a high level of safety

Dual enabling contacts with a separate actuator for each contact is IDEC's original design. This ensures a higher safety level. Disparity detection of category 4 (ISO 13849-1) can be achieved by using this switch with a safety relay module or a safety controller.



Actuators with plastic holders, applicable for HS5 series miniature interlock switches, can be used with the HE2G

Example of automatic and manual operation modes when HS5B/HS5D is used



Automatic mode

Operation modes can be changed by inserting/removing the actuator with plastic holder installed to the HE2G into the HS5B/HS5D.

When the actuator is inserted, the operation is in automatic mode. When the actuator is removed, the operation is in manual mode.



Manual mode

Actuator with plastic holder (optional) HE9Z-GP15

HS5B/HS5D Miniature Interlock Switch

Handstrap (optional) HG9Z-PS1

HS5E Miniature Interlock Switch

Types

3-Position Switch	Monitor Switch	Contact Configuration				Rubber Boot Material / Color	Wiring Style	Type No. (Ordering Type No.)		
		Emergency Stop Switch	Control Unit (A)	Control Unit (B)	Pilot Switch (green) (C)					
2 contacts	With (1NC)	Without				Silicon Rubber / (Yellow) (*2)	Solder Terminal	HE2G-21SH		
							NBR/PVC Polyblend / (Gray) (*3)	Internal Connector	HE2G-21SC	
		With (2NC)	Without		Without			Silicon Rubber / (Yellow) (*2)	Solder Terminal	HE2G-21SH-1N
					With				Internal Connector	HE2G-21SC-1N
		Without	Momentary Pushbutton (DPDT)	Without		Without		Solder Terminal	HE2G-21SHE	
							With	Solder Terminal	HE2G-21SHE-P-0	
		With (2NC)	Key Selector Switch (DPDT)	Without			Solder Terminal	HE2G-21SH-L-L		
							With	Solder Terminal	HE2G-21SHE-L-L	
							Internal Connector	HE2G-21SCE-L-L		
							Solder Terminal	HE2G-21SHE-L-K		
				Internal Connector	HE2G-21SCE-L-K					

*1) Additional control units installed on the HE2G are as follows:

Emergency Stop Switch: XA1E-BV3U02R
 Momentary Pushbutton: AB6M-M2PLW
 Key Selector Switch: AS6M-2KT2PA Pilot Light: UP9P-2498G

*2) Silicon rubber: Can be used in general factories. Remains flexible in cold temperatures. Suitable in applications with a wide operating temperature range.

*3) NBR/PVC polyblend: Oil-proof. Suitable for environments subjected to machine oil and painting robots where silicon rubber cannot be used.

Specifications

Degree of Protection (IEC 60529)	IP67 / 66 (without additional control units) IP65 (with additional control units)	
Conditional Short-circuit Current	50A (250V) (Note)	
Direct Opening Force	60N (monitor switch)	
Free Fall	1.0m 1 fall (IEC60068-2-32 compliant)	
Applicable Wire Size	Internal Connector	0.05 to 0.86 mm ² (AWG18 to 30) (AWG22 between switch and connector)
	Solder Terminal	0.5 mm ² maximum
Applicable Cable	Multicore cable diameter ϕ 4.5 to 10 mm	

Note) Use a 250V/10A fast-blow fuse as a short-circuit protector

Contact Ratings


Rated Insulation Voltage (Ui)	250V (momentary pushbutton and key selector: 125V) / 30V (with pilot light)				
Rated Thermal Current (Ith)	3A (emergency stop switch: 5A)*				
Rated Voltage (Ue)	30V	125V	250V		
Rated Current (Ie) 3-position switch (Terminal No. NO1-C1, NO2-C2)	AC	Resistive Load (AC-12)	—	1A	0.5A
		Inductive Load (AC-15)	—	0.7A	0.5A
	DC	Resistive Load (DC-12)	1A	0.2A	—
		Inductive Load (DC-13)	0.7A	0.1A	—

Note) Minimum applicable load (reference value): 3V AC/DC, 5 mA (Applicable operation area depends on the operating conditions.)

*However, operating temperature for internal connectors:

-25°C min., 40°C max. 2.5A (12 to 19 poles), 2A (20 to 22 poles)
 40°C min., 50°C max. 2.5A (8 to 12 poles), 2A (13 to 22 poles)
 50°C min., 60°C max. 2.5A (6, 7 poles), 2A (8 to 13 poles), 1.5A (14 to 22 poles)


Operation Characteristics

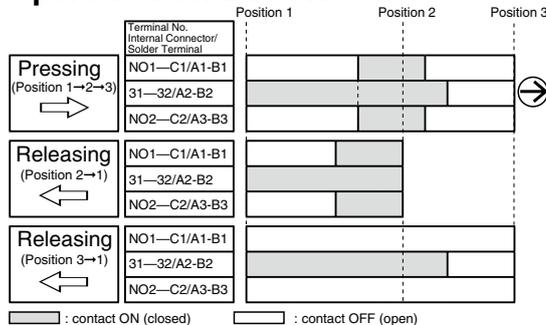

- Terminals NO1-C1/A1-B1, NO2-C2/A3-B3 are outputs of the 3-position enabling switch.
- The above operation characteristics show when the center of the grip switch button is pressed. Because two contacts are designed to operate independently, pressing the edge of the button turns on one contact earlier than the other contact, causing a delay in operation. To avoid this, always press the center of the button.


Specifications and other descriptions in this catalog are subject to change without notice.

Additional Control Unit Layout

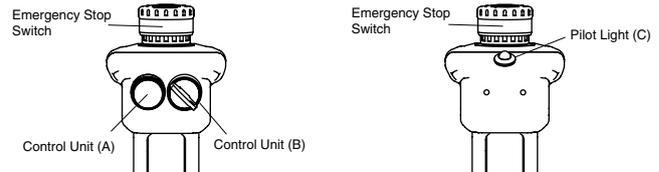

Contact Arrangement (Internal Connector)


Internal Connector Pin No.



3-position switch / control unit side connector:
 Tyco Electronics D-1200D Series
 Tab housing: 1-1903130-2 (4-pin connector)
 1-1903130-3 (6-pin connector)
 Tab contact: 19303116-2

- Emergency stop switch
- 3-position switch
- Momentary pushbutton
- Key selector switch

Terminal Arrangement (TOP VIEW)

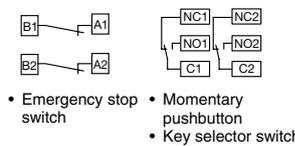

- Emergency stop switch
- Momentary pushbutton
- Key selector switch


6-Pin Connector Allotment Table

Internal Connector Pin No.	Momentary pushbutton	Key selector switch
A1	C2	
A2	NO2	
A3	NC2	
B1	C1	
B2	NO1	
B3	NC1	

- For signal of the 3-position switch, see "Operation Characteristics".
- For solder terminal type terminal arrangement of each control unit, see each catalog.

Dimensions

HE2G-21SH/HE2G-21SC

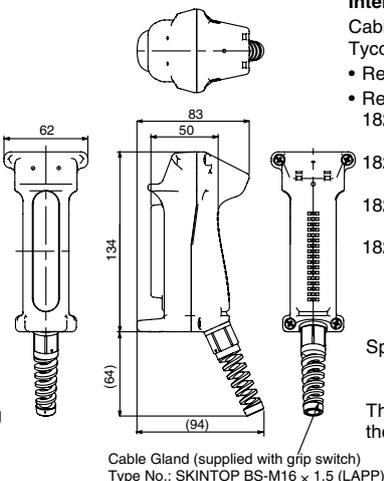

All dimensions in mm.

Internal Connector

Cable side connector:
 Tyco Electronics D-1200D Series

- Receptacle: 1-1827864-□
- Receptacle contact
- 1827586-2: AWG28 to 30 (Hand tool: 1762952-1)
- 1827587-2: AWG22 to 28 (Hand tool: 1762846-1)
- 1827588-2: AWG22 to 28 (Hand tool: 1762950-1)
- 1827589-2: AWG18 to 22 (Hand tool: 1762625-1)

Specify 2 or 3 in place of □.

- 2: 4-pin connector
- 3: 6-pin connector

The customer needs to purchase the connector separately.



IDEC CORPORATION

IDEC CORPORATION (USA)
 IDEC CANADA LIMITED
 IDEC AUSTRALIA PTY. LTD.
 IDEC ELECTRONICS LIMITED

IDEC ELEKTROTECHNIK GmbH
 IDEC (SHANGHAI) CORPORATION
 IDEC (BEIJING) CORPORATION
 IDEC (SHENZHEN) CORPORATION

IDEC IZUMI (H.K.) CO., LTD.
 IDEC TAIWAN CORPORATION
 IDEC IZUMI ASIA PTE. LTD.

7-31, Nishi-Miyahara 1-Chome, Yodogawa-ku, Osaka 532-8550, Japan
 Tel: +81-6-6398-2571, Fax: +81-6-6392-9731
 E-mail: marketing@idec.co.jp