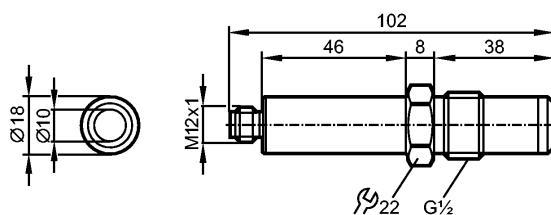


**TA3597**

TA-000KLER12- /US

Temperature sensors


CE EC 1935/2004 FDA
Product characteristics

Temperature transmitter

Quick disconnect

Process connection: G½ with sealing cone

flush mountable

Max. medium temperature

100 °C (continuous)

150 °C (max. 5 min. / peak)

Analog output

Measuring range: 0...100 °C

Measuring element: 1 x Pt 100, to DIN EN 60751, class A

Application

Application liquids and gases

Pressure rating [bar] 16

Electrical data

Electrical design DC

Operating voltage [V] 18...32 DC

Protection class III

Reverse polarity protection yes

Outputs

Output Analog output

Output function 4...20 mA analog

Analog output 4...20 mA

Measuring / setting range

Measuring range °C 0...100

Accuracy / deviations

Analog output [K] ± (0.25 K + 0.002 x |t|)

Temperature coefficients (in % of the span per 10 K) 0.1

Reaction times

Dynamic response T05 / T09 [s] 10 / 40 *)

Environment

Ambient temperature [°C] -20...70

Storage temperature [°C] -40...85

Protection IP 69K; in conjunction with a corresponding connector

Tests / approvalsEMC DIN EN 61000-6-2
DIN EN 61000-6-3

TA3597

TA-000KLER12- /US


Temperature sensors

Mechanical data

Process connection		G $\frac{1}{2}$ with sealing cone
Materials (wetted parts)		stainless steel 316L / 1.4404; Ra < 0.8; PEEK (polyether ether ketone)
Housing materials		stainless steel 316L / 1.4404; PEEK (polyether ether ketone)
Tightening torque	[Nm]	10
Weight	[kg]	0.145

Electrical connection

Connection		M12 connector; gold-plated contacts
------------	--	-------------------------------------

Wiring**Remarks**

Remarks		*) for water (70°C; 0.04 m/s)
Pack quantity	[piece]	1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — TA3597 — 23.09.2014