


**E20712**

FT-11-EPA-M3/F2X0.5/2M

Fibre optics

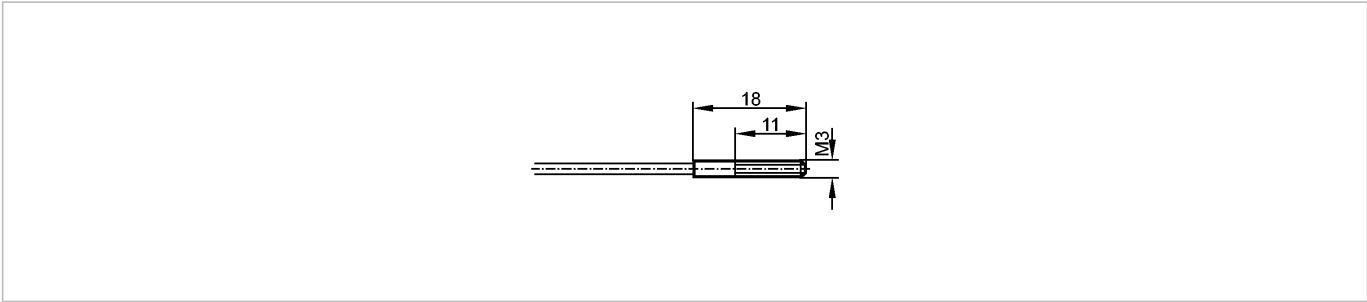

Made in Germany

**Product characteristics**

Diffuse reflection sensor

M3

Amplifier Range  
 OB50xx 20 mm  
 OBFxxx 25 mm  
 OO50xx 60 mm

**Range**

Range OB50xx: 20 mm / OBFxxx: 25 mm / OO50xx: 60 mm

**Environment**


Ambient temperature [°C] -40...70

**Mechanical data**

Design straight

Length [mm] 2000

Min. bending radius [mm] 10

Fiber arrangement  
  
 core diameter 2 x 0.5mm

Fibre optic PMMA

Sensing head aluminium

Sheathing PE (polyethylene)

Weight [kg] 0.032

**Accessories**

Accessories (included) 2 hexagon nuts; M3; 4 tooth lock washers; Adapter for OBF; Adapter for OOF

Accessories (optional) cutter E20600 for fibre optics (to be ordered seperatly)

**Remarks**

Pack quantity [piece] 1