

JUMO GmbH & Co. KG
Delivery address: Mackenrodtstraße 14,
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
E-mail: mail@jumo.net
Internet: www.jumo.net

JUMO Instrument Co. Ltd.
JUMO House
Temple Bank, Riverway
Harlow - Essex CM20 2DY, UK
Phone: +44 1279 63 55 33
Fax: +44 1279 63 52 62
E-mail: sales@jumo.co.uk
Internet: www.jumo.co.uk

JUMO Process Control, Inc.
8 Technology Boulevard
Canastota, NY 13032, USA
Phone: 315-697-JUMO
1-800-554-JUMO
Fax: 315-697-5867
E-mail: info@jumo.us
Internet: www.jumo.us



Mineral-insulated thermocouples to DIN 43 710 and EN 60 584

- for temperatures from -200 to +1200°C
- flexible sheath with shock-proof measuring insert
- protection tube diameter from 0.5mm
- fast response
- fitting length to suit application

Thanks to their special properties, mineral-insulated thermocouples are used in chemical plant, power stations, pipelines, in engine construction and on test beds. The thermocouple wires are embedded in compressed fire-resistant magnesium oxide inside the flexible thin-walled sheath.

The excellent heat transfer between the sheath and the thermocouple enables short response times ($t_{0.5}$ from 0.15sec) and high measurement accuracy. The shock-proof construction ensures a long life. The minimum bending radius is 5 x the external diameter. The minimum fitting length EL is 50mm for 0.5mm to 2.0mm dia., and 100mm for 3.0 to 6.0mm dia.

The thermocouples are normally insulated from the sheath. The measuring insert is fitted with thermocouples to EN 60 584 or DIN 43 710. Versions with two thermocouples are also available.

Test pressure: 40 bar (helium) leakage test at the measurement point.

Insulation resistance: thermocouple against sheath at ambient temperature for lengths up to 1m: 200M Ω , for lengths 1m and above: 200M Ω x m.



Technical data

Connection	available with cable ends as: bare wires, with ferrules, receptacles or multipole connector (e.g. connectors that are free from thermal emf)
Compensating cable	silicone, ambient temperature -50 to +180°C PTFE, ambient temperature -190 to +260°C metal braiding, ambient temperature -20 to +350°C
Protection tube	stainless steel 1.4541, thermocouple Type L and Type J Inconel 2.4816 (Inconel 600), thermocouple Type K
Measuring insert	insulated assembly: 1 x Fe-Con J, EN 60 584, Cl. 2, operating temperature -200 to +800°C 1 x Fe-Con L, DIN 43 710, Cl. 2, operating temperature -200 to +800°C 1 x NiCr-Ni K, EN 60 584, Cl. 2, operating temperature -200 to +1200°C 2 x Fe-Con L, DIN 43 710, Cl. 2, operating temperature -200 to +800°C 2 x NiCr-Ni K, EN 60 584, Cl. 2, operating temperature -200 to +1200°C
Response times	in water with 0.4m/sec / in air with 2m/sec 0.5mm dia: water $t_{0.5}$ = 0.15sec, $t_{0.9}$ = 0.30sec / air $t_{0.5}$ = 3.5sec, $t_{0.9}$ = 8.0sec 1.0mm dia: water $t_{0.5}$ = 0.20sec, $t_{0.9}$ = 0.60sec / air $t_{0.5}$ = 7.5sec, $t_{0.9}$ = 17.0sec 1.5mm dia: water $t_{0.5}$ = 0.40sec, $t_{0.9}$ = 0.90sec / air $t_{0.5}$ = 10.0sec, $t_{0.9}$ = 25.0sec 2.0mm dia: water $t_{0.5}$ = 0.80sec, $t_{0.9}$ = 2.60sec / air $t_{0.5}$ = 13.0sec, $t_{0.9}$ = 34.0sec 3.0mm dia: water $t_{0.5}$ = 1.00sec, $t_{0.9}$ = 2.80sec / air $t_{0.5}$ = 22.0sec, $t_{0.9}$ = 64.0sec 4.5mm dia: water $t_{0.5}$ = 2.50sec, $t_{0.9}$ = 6.50sec / air $t_{0.5}$ = 34.0sec, $t_{0.9}$ = 113.0sec 6.0mm dia: water $t_{0.5}$ = 3.00sec, $t_{0.9}$ = 9.00sec / air $t_{0.5}$ = 55.0sec, $t_{0.9}$ = 170.0sec

JUMO GmbH & Co. KG

Delivery address: Mackenrodtstraße 14,
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
E-mail: mail@jumo.net
Internet: www.jumo.net

JUMO Instrument Co. Ltd.

JUMO House
Temple Bank, Riverway
Harlow - Essex CM20 2DY, UK
Phone: +44 1279 63 55 33
Fax: +44 1279 63 52 62
E-mail: sales@jumo.co.uk
Internet: www.jumo.co.uk

JUMO Process Control, Inc.

8 Technology Boulevard
Canastota, NY 13032, USA
Phone: 315-697-JUMO
1-800-554-JUMO
Fax: 315-697-5867
E-mail: info@jumo.us
Internet: www.jumo.us



Lead resistances in Ω/m at 20°C for mineral-insulated thermocouples

Diameter D in mm	1 thermocouple resistance in Ω/m	2 thermocouples resistance in Ω/m
Thermocouple Fe-Con L		
6.0	0.66	0.85
4.5	1.40	1.80
3.0	2.70	3.50
2.0	5.00	7.70
1.5	12.00	-
1.0	21.50	-
Thermocouple Fe-Con J		
6.0	0.54	-
3.0	2.10	-
2.0	8.60	-
1.5	15.00	-
1.0	34.00	-
Thermocouple NiCr-Ni K		
6.0	0.88	2.70
4.5	1.56	4.80
3.0	3.50	11.00
2.0	7.90	25.00
1.5	14.00	-
1.0	32.00	-
0.5	126.00	-


JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 E-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow - Essex CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 63 52 62
 E-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk


JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13032, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 E-mail: info@jumo.us
 Internet: www.jumo.us




Dimensions




Type 901210/10

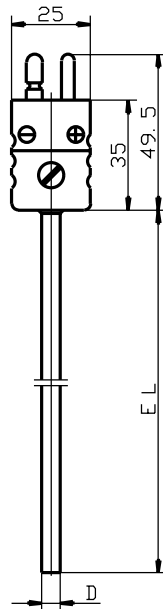

Type 901240/20



Type 901250/3x

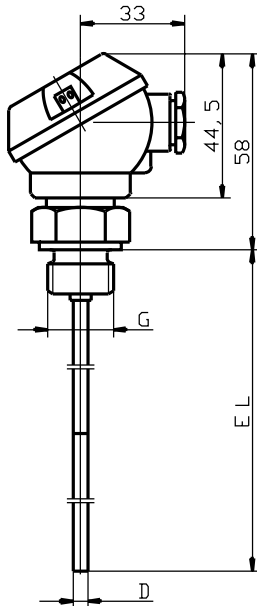

Type 901230/40

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 E-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow - Essex CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 63 52 62
 E-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13032, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 E-mail: info@jumo.us
 Internet: www.jumo.us



Order details: Mineral-insulated thermocouples to DIN 43 710 and EN 60 584

(1) Basic version

901210/10 Mineral-insulated thermocouple
with bare connecting wires



901240/20 Mineral-insulated thermocouple
with standard flat emf-free connector



(2) Measuring insert / operating temperature in °C

x	x	1040	1 x Fe-Con J, operating temperature -200 to +800°C, sheath, Mat. Ref. 1.4541
x	x	1042	1 x Fe-Con L, operating temperature -200 to +800°C, sheath, Mat. Ref. 1.4541
x	x	1043	1 x NiCr-Ni K, operating temperature -200 to +1200°C, sheath, Mat. Ref. 2.4816
x	x	2042	2 x Fe-Con L, operating temperature -200 to +800°C, sheath, Mat. Ref. 1.4541
x	x	2043	2 x NiCr-Ni K, operating temperature -200 to +1200°C, sheath, Mat. Ref. 2.4816

(3) Protection tube diameter D in mm

x	x	0.5	0.5mm, only with Type 1 x NiCr-Ni K
x	x	1	1mm
x	x	1.5	1.5mm
x	x	2	2mm
x	x	3	3mm
x	x	4.5	4.5mm
x	x	6	6mm

(4) Fitting length EL in mm (50 ≤ EL ≤ 50000)

x	x	100	100mm
x	x	200	200mm
x	x	300	300mm
x	x	400	400mm
x	x	500	500mm
x	x	...	please specify in plain text (50mm steps)

(5) Extra codes

x	x	000	no extra code
x	x	309	uninsulated assembly (thermocouple welded to tip)

Order code (1) - (2) - (3) - (4) / (5)
Order example 901210/10 - 1042 - 3 - 200 / 000

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 E-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow - Essex CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 63 52 62
 E-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13032, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 E-mail: info@jumo.us
 Internet: www.jumo.us



Order details: Mineral-insulated thermocouples to DIN 43 710 and EN 60 584

(1) Basic version

901250/32	Mineral-insulated thermocouple with siliconized compensating cable	
901250/33	Mineral-insulated thermocouple with PTFE- insulated compensating cable	
901250/34	Mineral-insulated thermocouple and compensating cable with metal-braiding and glass silk insulation	

(2) Measuring insert / operating temperature in °C

x x x	1040	1 x Fe-Con J, operating temperature -200 to +800°C, sheath, Mat. Ref. 1.4541
x x x	1042	1 x Fe-Con L, operating temperature -200 to +800°C, sheath, Mat. Ref. 1.4541
x x x	1043	1 x NiCr-Ni K, operating temperature -200 to +1200°C, sheath, Mat. Ref. 2.4816
x x	2042	2 x Fe-Con L, operating temperature -200 to +800°C, sheath, Mat. Ref. 1.4541
x x	2043	2 x NiCr-Ni K, operating temperature -200 to +1200°C, sheath, Mat. Ref. 2.4816

(3) Protection tube diameter D in mm

x x x	0.5	0.5mm, only with Type 1 x NiCr-Ni K
x x x	1	1mm
x x x	1.5	1.5mm
x x x	2	2mm
x x x	3	3mm
x x x	4.5	4.5mm
x x x	6	6mm

(4) Fitting length EL in mm (50 ≤ EL ≤ 50000)

x x x	100	100mm
x x x	200	200mm
x x x	300	300mm
x x x	400	400mm
x x x	500	500mm
x x x	...	please specify in plain text (50mm steps)

(5) Compensating cable end

x x x	03	bare cable ends
x x x	11	ferrules to DIN 46 228 Part 4 (standard)
x x x	13	receptacle 6.3 to DIN 46 247
x x x	80	multipole connector (please specify type in plain text)

(6) Compensating cable length AL in mm (500 ≤ AL ≤ 500000)

x x x	2500	2500mm (standard)
x x x	...	please specify in plain text (500mm steps)

(7) Extra codes

x x x	000	no extra code
x x x	309	uninsulated assembly (thermocouple welded to tip)
x x x	317	shielded compensating cable

Order code (1) - (2) - (3) - (4) - (5) - (6) / (7) ,...
Order example 901250/32 - 1042 - 3 - 200 - 11 - 2500 / 000¹

1. List extra codes in sequence, separated by commas.

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14,
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 E-mail: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow - Essex CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 63 52 62
 E-mail: sales@jumo.co.uk
 Internet: www.jumo.co.uk


JUMO Process Control, Inc.
 8 Technology Boulevard
 Canastota, NY 13032, USA
 Phone: 315-697-JUMO
 1-800-554-JUMO
 Fax: 315-697-5867
 E-mail: info@jumo.us
 Internet: www.jumo.us



Order details: Mineral-insulated thermocouples to DIN 43 710 and EN 60 584

(1) Basic version

901230/40 Mineral-insulated thermocouple
 with terminal head Form J



(2) Measuring insert / operating temperature in °C

- x 1040 1 x Fe-Con J, operating temperature -200 to +800°C, sheath, Mat. Ref. 1.4541
- x 1042 1 x Fe-Con L, operating temperature -200 to +800°C, sheath, Mat. Ref. 1.4541
- x 1043 1 x NiCr-Ni K, operating temperature -200 to +1200°C, sheath, Mat. Ref. 2.4816
- x 2042 2 x Fe-Con L, operating temperature -200 to +800°C, sheath, Mat. Ref. 1.4541
- x 2043 2 x NiCr-Ni K, operating temperature -200 to +1200°C, sheath, Mat. Ref. 2.4816

(3) Protection tube diameter D in mm

- x 3 3mm
- x 4.5 4.5mm
- x 6 6mm

(4) Fitting length EL in mm (50 ≤ EL ≤ 5000)

- x 100 100mm
- x 200 200mm
- x 300 300mm
- x 400 400mm
- x 500 500mm
- x ... please specify in plain text (50mm steps)

(5) Process connection

- x 103 thread 3/8" pipe
- x 104 thread 1/2" pipe

(6) Extra codes

- x 000 no extra code
- x 309 uninsulated assembly (thermocouple welded to tip)

Order code (1) (2) (3) (4) (5) (6)
 _____ - _____ - _____ - _____ - _____ / _____
Order example 901230/40 - 1042 - 6 - 200 - 104 / 000

JUMO GmbH & Co. KG

Delivery address: Mackenrodtstraße 14,
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
E-mail: mail@jumo.net
Internet: www.jumo.net

JUMO Instrument Co. Ltd.

JUMO House
Temple Bank, Riverway
Harlow - Essex CM20 2DY, UK
Phone: +44 1279 63 55 33
Fax: +44 1279 63 52 62
E-mail: sales@jumo.co.uk
Internet: www.jumo.co.uk

JUMO Process Control, Inc.

8 Technology Boulevard
Canastota, NY 13032, USA
Phone: 315-697-JUMO
1-800-554-JUMO
Fax: 315-697-5867
E-mail: info@jumo.us
Internet: www.jumo.us

**Stock versions**

(1)	(2)	(3)	(4)	(5)	(6)	(7)	Sales No.
901250/32	- 1042	- 3	- 100	- 11	- 2500	/ 000	90/00056809
901250/32	- 1042	- 3	- 200	- 11	- 2500	/ 000	90/00068433
901250/32	- 1042	- 1,5	- 100	- 11	- 2500	/ 000	90/00056811
901250/32	- 1042	- 1,5	- 200	- 11	- 2500	/ 000	90/00068438
901250/32	- 1043	- 6	- 100	- 11	- 2500	/ 000	90/00056812
901250/32	- 1043	- 6	- 200	- 11	- 2500	/ 000	90/00068427
901250/32	- 1043	- 3	- 100	- 11	- 2500	/ 000	90/00056813
901250/32	- 1043	- 3	- 200	- 11	- 2500	/ 000	90/00068441
901250/32	- 1043	- 3	- 300	- 11	- 2500	/ 000	90/00068442
901250/32	- 1043	- 3	- 500	- 11	- 2500	/ 000	90/00068443
901250/32	- 1043	- 1,5	- 100	- 11	- 2500	/ 000	90/00049205
901250/32	- 1043	- 1,5	- 200	- 11	- 2500	/ 000	90/00068436
901250/32	- 1043	- 1,5	- 500	- 11	- 2500	/ 000	90/00068437
901250/32	- 1043	- 0,5	- 100	- 11	- 2500	/ 000	90/00066345

Stock versions

(1)	(2)	(3)	(4)	(5)	(6)	Sales No.
901230/40	- 1043	- 6	- 200	- 104	/ 000	90/00068430
901230/40	- 1043	- 6	- 300	- 104	/ 000	90/00068431