

Socket for relay with 2 C/O contacts, screw terminals, contact terminals all on upper side



Product designation
Product type designation

SOCKET
HR6X

Contact characteristics


Rated insulation voltage U_i IEC/EN	V	250
Rated impulse withstand voltage U_{imp}	kV	4

Mechanical features

Fixing


On 35mm DIN rail and with screw

Dimensions

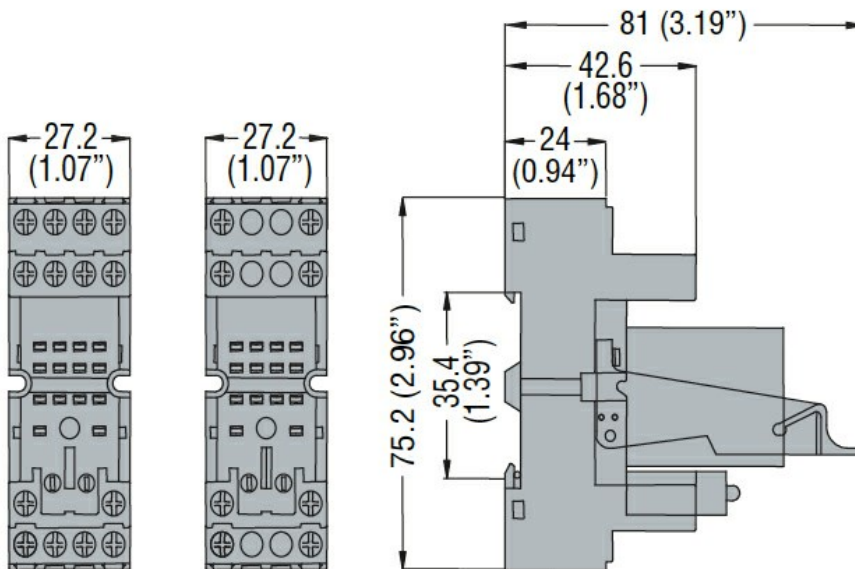

Wiring diagrams

Socket for relay with 2 C/O contacts, screw terminals, contact terminals all on upper side

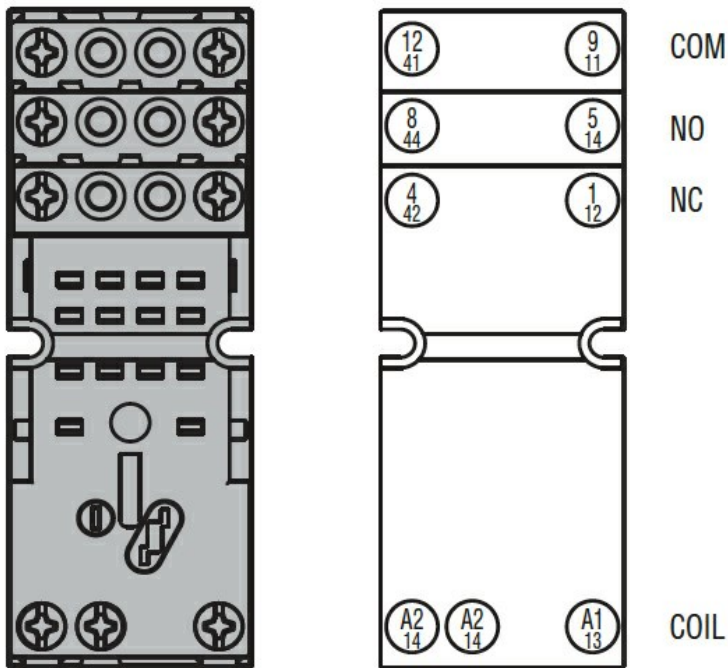

Certifications and compliance

Compliance

IEC/EN 61810

Certificates

CSA

cURus

EAC

ETIM classification

ETIM 8.0

EC001456 -
Relay socket