




Product designation	Float switches for grey water		
Product type designation	LVFSN1		
Function	Emptying or filling function		
Counterweights			
Counterweight	External (provided with the float switch)		
Activation angle	45°		
Relay outputs			
Number of relays	N°	1	
Contact arrangement	1 changeover contact C/O-SPDT		
Rated operational voltage AC (IEC)	VAC	250	
Contact ratings	AC1 10A 250VAC AC15 8A 250VAC		
Connections			
Maximum cable length	m / ft	10	
Ambient conditions			
Temperature			
Operating temperature		max	°C +50
Storage temperature		max	°C 80
Maximum operating pressure	bar	3	
Maximum installation depth	m	30	
Housing			
Cable material	Neoprene H07 RN-FX31		
Float casing material	Polypropylene		
IEC degree of protection	IP68		
Weight	g	1510	
Dimensions			

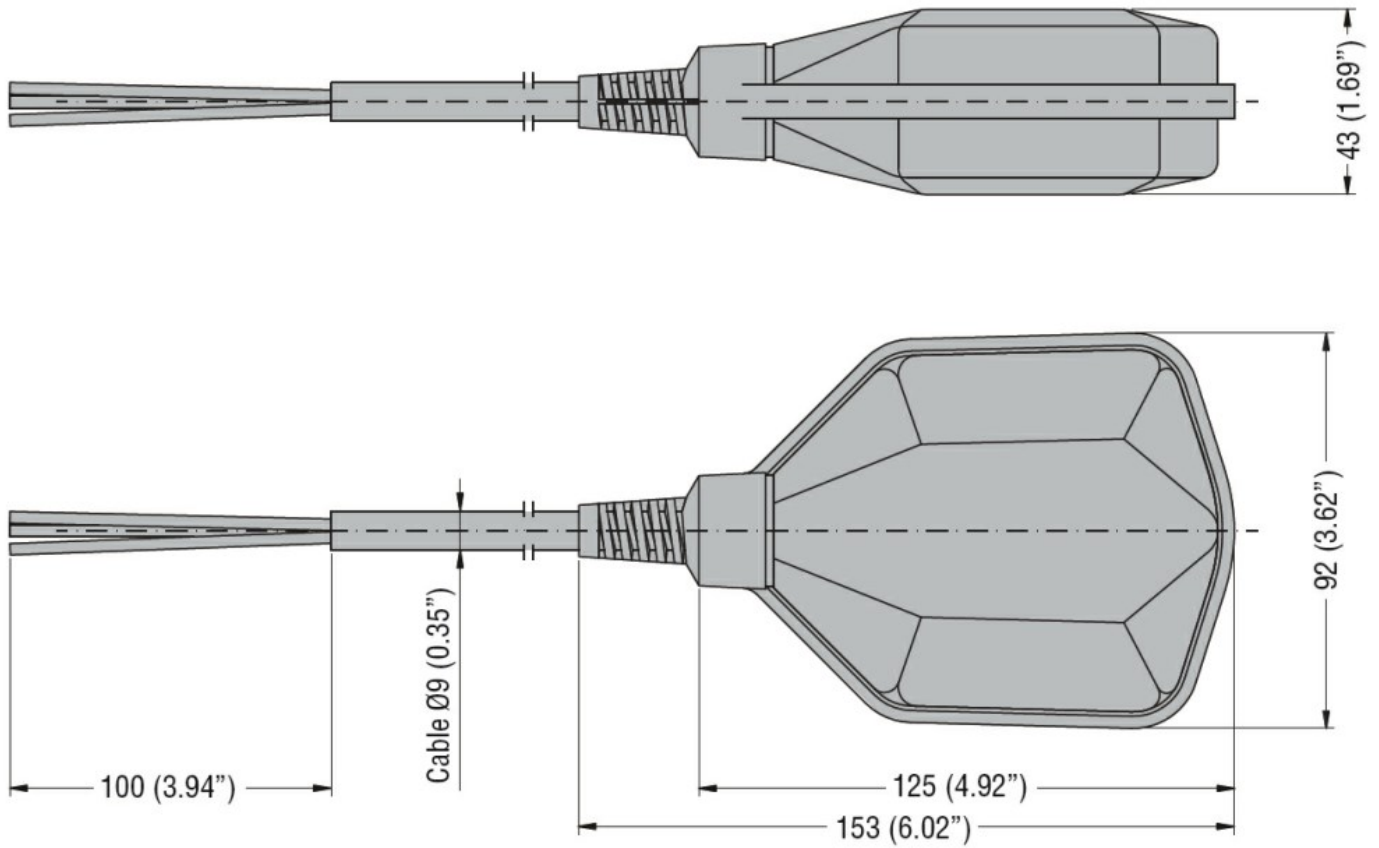

Certifications and compliance

Compliance

IEC/EN 60730-1
 IEC/EN 60730-2-15

Certificates

TÜV-SUD