



Monoblock buzzer  
- Continuous or pulse tone  
LPCZS

Product designation

Product type designation

**General characteristics**

Material	Polyamide
IEC degree of protection	IP40 on front and IP20 on rear

**Electrical characteristics**

Rated impulse withstand voltage Uimp	kV	4
Rated frequency	Hz	50-60
Supply voltage (AC)	V	18...30
Supply voltage (DC)	V	18...30

**Mechanical features**

Tightening torque for terminals max	Nm	0.5
Screwdriver	Flat-head: 0.6x3.5mm/0.02x0.	

Conductor section

AWG/kcmil conductor section	min	24
	max	14
IEC	min	mm <sup>2</sup> 0.5
	max	mm <sup>2</sup> 2.5

Weight	g	20
--------	---	----

**UL technical data**


UL degree of protection	1, 2, 3R, 4, 4X, 12, 12K on front
-------------------------	-----------------------------------

**Ambient conditions**


Temperature

Operating temperature	min	°C	-25
	max	°C	+70
Storage temperature	min	°C	-40
	max	°C	+85

**Dimensions**

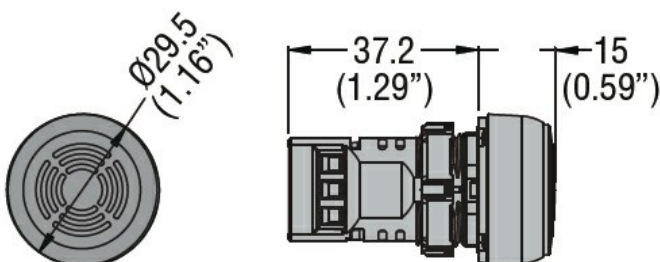

**Wiring diagrams**

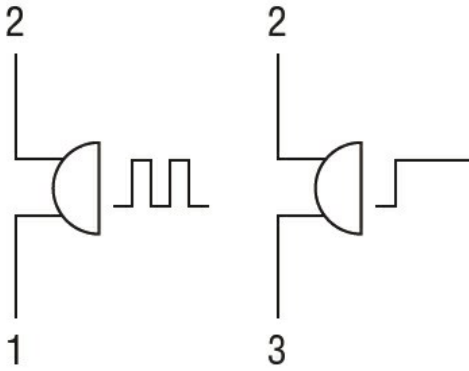

Certifications and compliance

Compliance

IEC/EN 60947-1  
IEC/EN 60947-5-1

Certificates

cULus