


BMF 235K-PS-C-2A-SA95-S4-00,3
Ordering code: BMF00C9

Sensors for cylinders
BMF 235
 Cylinder housing: T-slot

PNP, Normally open (NO)
 Miniature

BALLUFF
sensors worldwide

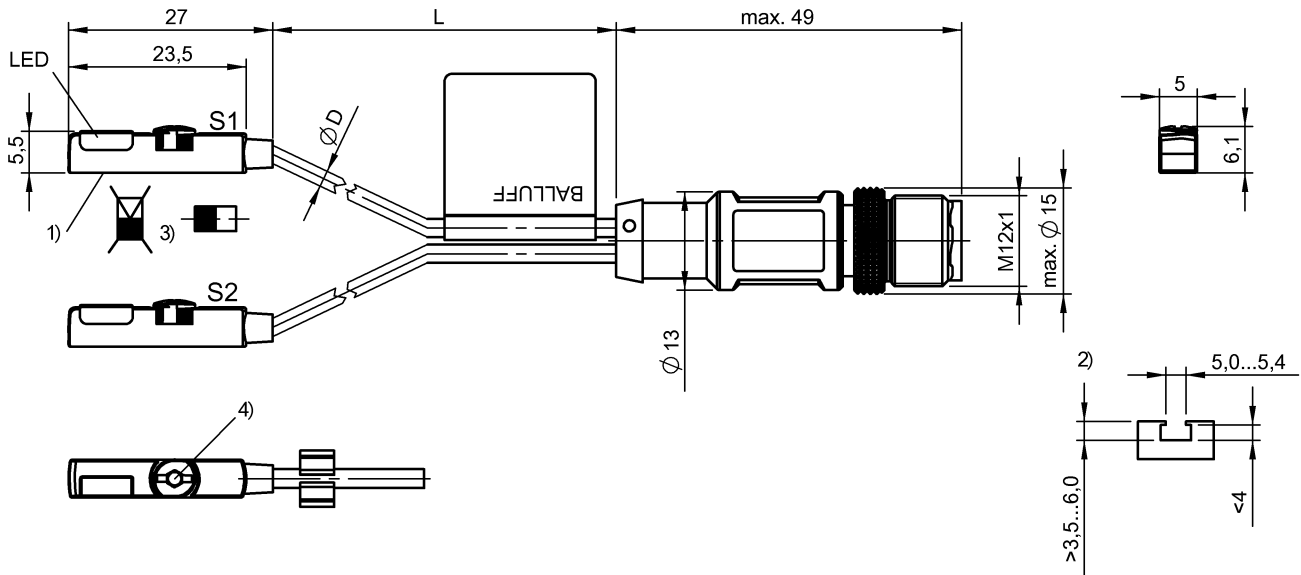

1) Active surface, 2) See remarks, 3) See remarks, 4) See remarks

Characteristic data

Connection type	Cable with connector
Operating voltage	10...30 V DC
Trademark	GLOBAL
Short-circuit protected	yes
Protected against polarity reversal	yes
Protected against miswiring	no

Electrical data

Electrical version	DC, direct current
Rated operating voltage U _e DC	24,0 V
Effective operating current I _e	200 mA
Rated insulation voltage U _i	75 DC
Rated short circuit current	100 A
Output resistance R _a	Open drain
Load capacitance max. (at U _e)	1 µF
No-load current I _o damped max.	6 mA
Max. no-load cur. I _o undamped	3 mA
Off-state current I _r max.	80 µA
Ripple max. (% of U _e)	15
Switching freq. f max.	3000 Hz
Voltage drop static max.	2,5 V
Turn-off delay t _{off} max.	0,10 ms
Turn-on delay t _{on} max.	0,10 ms
Rated switching field strength	1,2 kA/m
Assured switching field strength	2 kA/m

Mechanical data

Housing material	PA 12
Sensing surface material	PU
Cable jacket material	PUR
Cable short designation	Li12Y11Y-O
Cable length	0,3 m
Cable diameter D max.	2,5
Connector type	M12x1-S04
Ambient temperature	-25...85 °C
Temperature drift max. % of H _n	0,3 %
Tightening torque	0.4 Nm

Basic data

Enclosure Type per IEC 60529	IP67
Degree of contamination	3
Basic standard	IEC 60947-5-2
Utilisation category	DC 13

Remarks

- Scope of delivery Cable clip for T-slot
- 2) Application area: pneumatic cylinder with t-slot. For dimensions, see sketch in product view.
- 4) Hex key size 2.0 mm: Max. tightening torque 0.4 Nm. Screwdriver 4x0.8 mm: Max. tightening torque 1 Nm
- Rated operating current I_e for thermally coupled installation in metal.
- 3) Damping magnet, axially magnetized



BMF 235K-PS-C-2A-SA95-S4-00,3
Ordering code: **BMF00C9**

Sensors for cylinders
BMF 235
Cylinder housing: T-slot

PNP, Normally open (NO)
Miniature

BALLUFF
sensors worldwide

