


# Data sheet

valid from: 2/8/19



**Short Version**  
**Float in PVDF with magnet**  
**With solvent cement sockets PVC-U BS Inch**

Type	Scale range (l/h)	d (inch)	DN (mm)	Taper tube in Polysulfone O-rings in EPDM Code	Taper tube in PVC- U transp. Orings in EPDM Code	Weight (kg)	D (mm)	L (mm)	L1 (mm)	L2 (mm)
SK500	2.5 - 25	3/8	10	<b>198 807 010</b>	<b>20014A300</b>	0.180	35	199	171	165
SK510	5 - 50	3/8	10	<b>198 807 011</b>	<b>20014A301</b>	0.180	35	199	171	165
SK520	10 - 100	3/8	10	<b>198 807 012</b>	<b>20014A302</b>	0.180	35	199	171	165
SK600	8 - 80	1/2	15	<b>198 807 013</b>	<b>20014A303</b>	0.180	43	223	191	185
SK610	15 - 150	1/2	15	<b>198 807 014</b>	<b>20014A304</b>	0.250	43	223	191	185
SK620	20 - 200	1/2	15	<b>198 807 015</b>	<b>20014A305</b>	0.170	43	223	191	185
SK700	15 - 150	1	25	<b>198 807 016</b>	<b>20014A306</b>	0.470	60	250	206	200
SK710	30 - 300	1	25	<b>198 807 017</b>	<b>20014A307</b>	0.380	60	250	206	200
SK720	50 - 500	1	25	<b>198 807 018</b>	<b>20014A308</b>	0.370	60	250	206	200
SK730	100 - 1000	1	25	<b>198 807 019</b>	<b>20014A309</b>	0.370	60	250	206	200

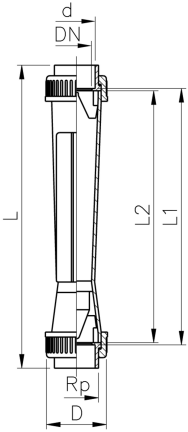

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: [info.ps@georgfischer.com](mailto:info.ps@georgfischer.com)

Internet: <http://www.gfps.com>