




**Check valve type 561 PVC-U**  
With solvent cement sockets Inch BS

**Model:**

- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

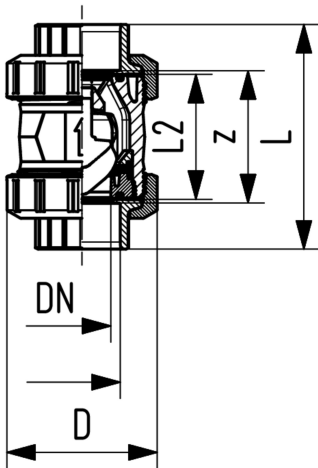

d	Size	DN	PN	kv-value	EPDM	SP	Weight	FPM	SP	Weight
(mm)	(inch)	(mm)	(bar)	( $\Delta p=1$ bar)	Code		(kg)	Code		(kg)
				(L/min)						
	3/8	10	16	190	<b>161 561 061</b>	1	0.120	<b>161 561 071</b>	1	0.120
	1/2	15	16	180	<b>161 561 062</b>	1	0.120	<b>161 561 072</b>	1	0.120
	3/4	20	16	380	<b>161 561 063</b>	1	0.250	<b>161 561 073</b>	1	0.270
	1	25	16	460	<b>161 561 064</b>	1	0.276	<b>161 561 074</b>	1	0.280
	1 1/4	32	16	850	<b>161 561 065</b>	1	0.490	<b>161 561 075</b>	1	0.490
	1 1/2	40	16	1080	<b>161 561 066</b>	1	0.760	<b>161 561 076</b>	1	0.770
	2	50	16	1670	<b>161 561 067</b>	1	1.374	<b>161 561 077</b>	1	1.370
75		65	16	2950	<b>161 561 008</b>	1	3.160	<b>161 561 018</b>	1	3.170
	3	80	16	3600	<b>161 561 069</b>	1	5.070	<b>161 561 079</b>	1	5.090
	4	100	16	4150	<b>161 561 070</b>	1	8.010	<b>161 561 080</b>	1	8.050

D	L	L2	z	closest inch
(mm)	(mm)	(mm)	(mm)	(inch)
50	92	56	60	
50	95	56	60	
58	110	65	69	
68	123	71	75	
84	146	85	89	
97	157	89	97	
124	183	101	110	
166	233	136	144	2 1/2
200	254	141	151	
238	301	164	174	

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: [info.ps@georgfischer.com](mailto:info.ps@georgfischer.com)

Internet: <http://www.gfps.com>