


TW2001

TW-150KLBM30-KFDKG/US

Temperature sensors

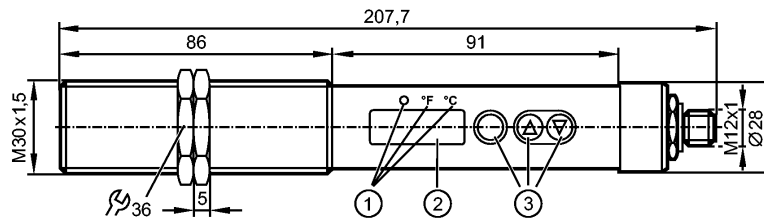

- 1: LEDs (display unit / switching status)
- 2: 7-segment LED display (4 digits)
- 3: Programming buttons



Product characteristics

Infrared temperature sensor
Threaded type M30 x 1.5
M12 connector
wave length range 1.0...1.7 µm
Switching output, Analog output
7-segment LED display (4 digits)
Measuring range: 250...1600 °C / 482...2912 °F

Application

Application	tempering temperatures, glass melting, graphite, ceramics, metals, forging, sintering, heat treatment, rolling
-------------	--

Electrical data

Electrical design	DC PNP
Operating voltage [V]	18...32 DC; to SELV/PELV
Current consumption [mA]	< 50
Insulation resistance [MΩ]	> 100 (50 V DC)
Protection class	III
Reverse polarity protection	yes

Inputs

Test input	
------------	--

Outputs

Output	Switching output, Analog output
Output function	normally open / closed programmable
Current rating [mA]	150
Voltage drop [V]	< 2.5
Short-circuit protection	yes (non-latching)
Short-circuit proof	yes
Overload protection	yes
Analog output	4...20 mA
Max. load [Ω]	500

Measuring / setting range


Measuring range	250...1600 °C	482...2912 °F
wave length range [µm]	1.0...1.7	

TW2001

TW-150KLB30-KFDKG/US

Temperature sensors

Measuring range / distance [mm]

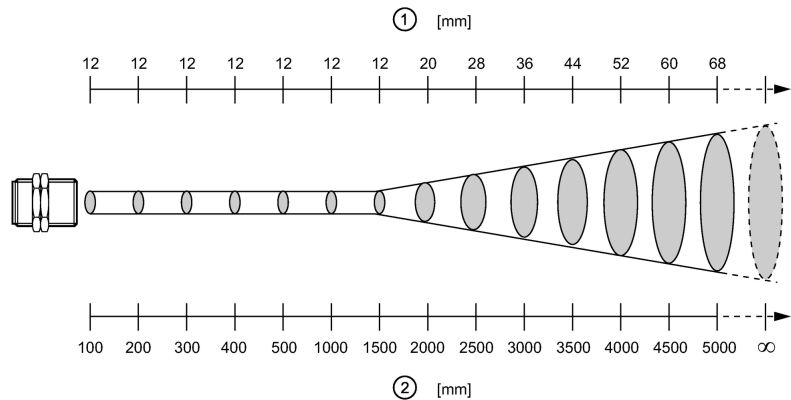

1: diameter of the measured spot; 2: measuring distance

Setting range		
Set point, SP	251...1600 °C	484...2912 °F
Reset point, rP	250...1599 °C	482...2910 °F
Analog start point, ASP	250...1400 °C	482...2552 °F
Analog end point, AEP	450... 1600 °C	842...2912 °F
in steps of	1 °C	1 °F
Resolution		
Switching output [K]		1
Analog output [K]	0.2; + 0.03 % of the set measuring span	
Display [K]		1
Accuracy / deviations		
Accuracy	< ± 0.5 %; of the measured value, at least 4 K (degree of emission = 1, T = 23°C)	
Repeatability [K]		1
Reaction times		
Power-on delay time [s]		< 1
Response time Switching output[ms]		< 2 (T > 600 °C)
Software / programming		
Adjustment of the switch point	Programming buttons	
Programming options	Analogue range; NO / NC; switch-on / switch-off delay; damping, peak hold	
Environment		
Ambient temperature [°C]		0...65
Storage temperature [°C]		-20...80
Max. relative air humidity		< 95 % (non condensing)
Protection		IP 65
Tests / approvals		
EMC	DIN EN 61000-6-2 DIN EN 61000-6-4	
Shock resistance	DIN EN 60068-2-27	30 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)
MTTF [Years]		74
Mechanical data		
Housing materials	threaded sleeve: stainless steel (303S22); polyester	
Lens material	tempered optical glass	
Weight [kg]		0.427

TW2001

TW-150KLBM30-KFDKG/US

Temperature sensors

Displays / operating elements

Display	Display unit 2 x LED yellow Switching status 1 x LED yellow Function display 7-segment LED display 4-digit Measured values 7-segment LED display 4-digit
Operating elements	3 Pushbuttons



Electrical connection

Connection	M12 connector
------------	---------------

Wiring

Core colors

BK	black
BN	brown
BU	blue
GY	grey
WH	white



OUT1: Switching output
 OUT2: Analog output

Accessories

Accessories (included)	2 lock nuts
------------------------	-------------

Remarks

Remarks	Use a screened cable to protect infrared temperature sensors from interference. The screen must be connected to the housing of the sensor via the connector.
---------	--

Pack quantity	[piece]	1
---------------	---------	---