


VTV12A

VIBRATION TRANSMITTER

Diagnostic systems

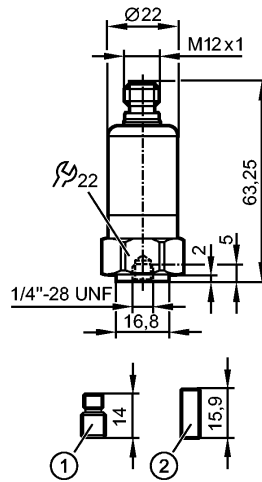

- 1: Threaded adapter 1/4"-28 UNF / M8 x 1.25 mm
 - 2: Threaded adapter 1/4"-28 UNF
- tightening torque 8 Nm



Product characteristics

Vibration transmitter
Connection via M12 connector
Vibration transmitter to ISO 10816
Measuring range RMS: 0...25 mm/s
Analogue output 4...20 mA
2-wire connection technology
ATEX approval
Group II, category 3D/3G

Application

Application	Vibration transmitter Vrms to ISO 10816
-------------	---

Electrical data

Operating voltage [V]	9.6...32 DC
Protection class	III

Inputs / outputs

Inputs / outputs total	1
------------------------	---

Outputs

analogue	
current output [mA]	4...20
Max. load [Ω]	max. (U _b - 9.6 V) x 50; 720 at U _b = 24 V

Measuring / setting range

Measuring range [mm/s]	0...25 RMS
Frequency range [Hz]	10...1000

Accuracy / deviations

Accuracy [% of the final value]	< ± 3
Repeatability	< 0.5 %
Linearity	0.25 %

Environment

Ambient temperature [°C]	-20...60
--------------------------	----------

VTV12A

VIBRATION TRANSMITTER

Diagnostic systems

Protection	IP 67; when used outside hazardous areas: IP 69K
------------	--

Tests / approvals

Marking of the unit	<p>Ⓔ II 3D Ex tc IIIC T110°C Dc X</p> <p>Ⓔ II 3G Ex nA IIC T4 Gc X</p>
EMC	<p>EN 61000-4-2 ESD: 4 kV CD / 8 kV AD</p> <p>EN 61000-4-3 HF radiated: 10 V/m</p> <p>EN 61000-4-4 Burst: 2 kV</p> <p>EN 61000-4-6 HF conducted: 10 V</p>
Shock resistance	400 g
MTTF [Years]	864.81

Mechanical data


Type of sensor	Microelectromechanical system (MEMS)
Number of measurement axes	1
Housing materials	stainless steel 316L / 1.4404
Type of mounting	set screw
Weight [kg]	0.14

Electrical connection

Connection	M12 connector
------------	---------------

Wiring

- 1: L+
- 2: 4...20 mA



Accessories

Accessories (included)	Threaded adapter 1/4"-28 UNF / M8 x 1.25 mm; Threaded adapter 1/4"-28 UNF
------------------------	---

Remarks

Pack quantity [piece]	1
-----------------------	---