


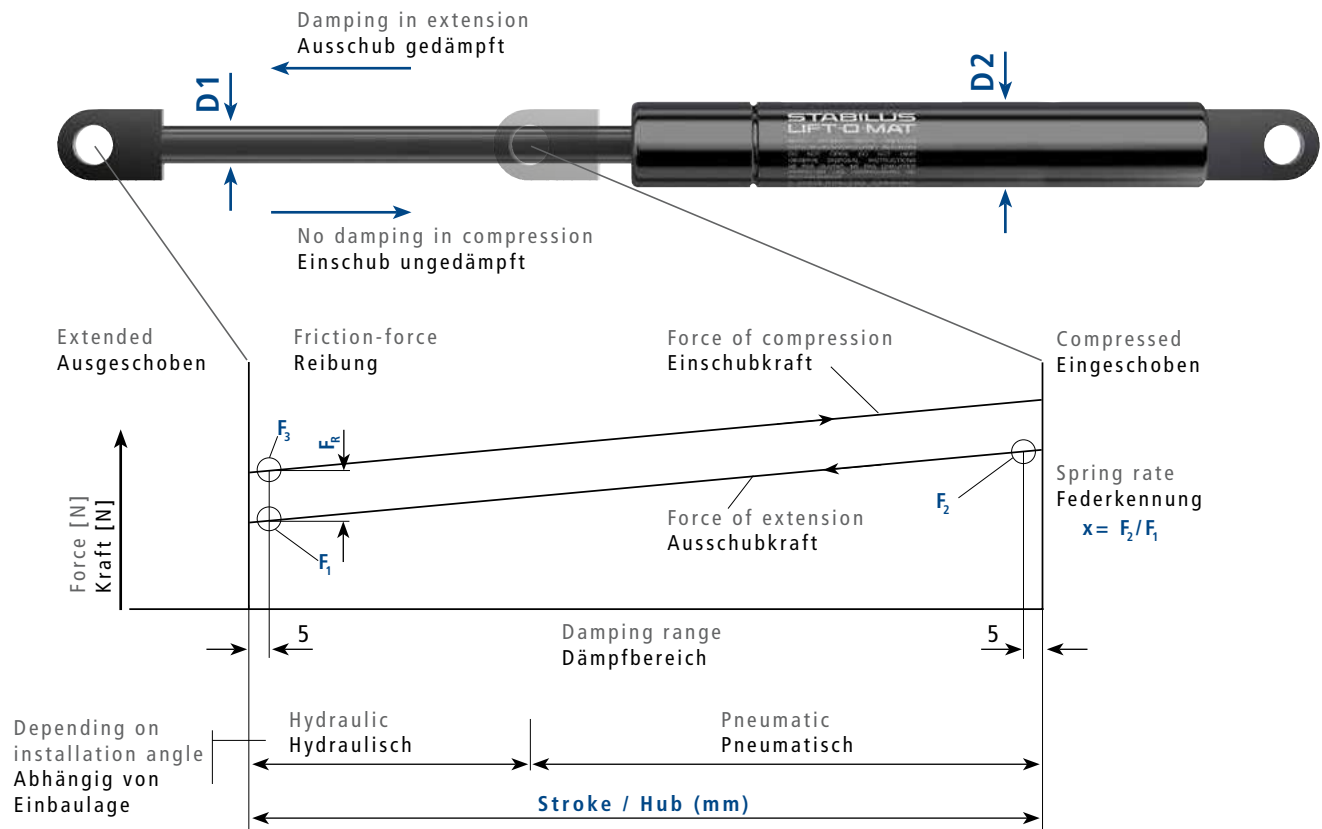

D1 [mm]	D2 [mm]	Force of extension Ausschubkraft F_1 [N]	Stroke max. Hub [mm]	x ($\approx$)	F_R max. [N]
6	15	50 - 400	150	1,30	50
8	19	100 - 800	250	1,35	60
10	22	150 - 1150	400	1,40	80
14	28	500 - 2100	500	1,50	80
20	42	2400 - 5200	500	1,45	150

Installation instruction
Einbauvorschrift
STAB-Spec. 1000 5593

Statically measured forces
Statische Messung der Kräfte
STAB-Spec. 1000 9033

Disposal instruction
Entsorgungsvorschrift
STAB-Spec. 1000 9375
www.Stabilus.com/service-spare-parts/recycling/
www.Stabilus.de/service-ersatzteile/recycling/

A		B	
Stroke Hub	Extended length Ausgesch. Länge	Force / Kraft F _i [N]	Ref.-No. Bestell-Nr.
200	485	100	084573
		150	094854
		200	084581
		250	094862
		300	084603
		350	094870
		400	084611
		500	084638
	600	084646	
	485,5	700	084654
800		094889	
220	525	100	084662
		150	094897
		200	084670
		250	094900
		300	084689
		350	094919
		400	084697
		500	084700
		600	084719
		525,5	700
	800		094927
	250	585	100
150			094935
200			084743
250			094943
300			084751
350			094951
400			084778
500			084786
600		084794	
585,5		700	084808
	800	094978	

LIFT-O-MAT®