



Product designation
Product type designation

SOCKET
HR5X

Contact characteristics


Rated insulation voltage U_i IEC/EN	V	250
Rated impulse withstand voltage U_{imp}	kV	4

Mechanical features

Fixing


DIN rail or with
screws

Dimensions

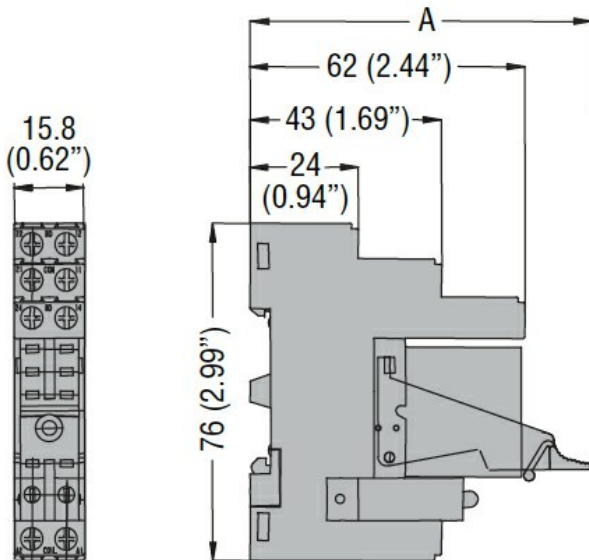

A: 65mm (2.56") con HR3X88
75mm (2.95") con XR5X88

Wiring diagrams

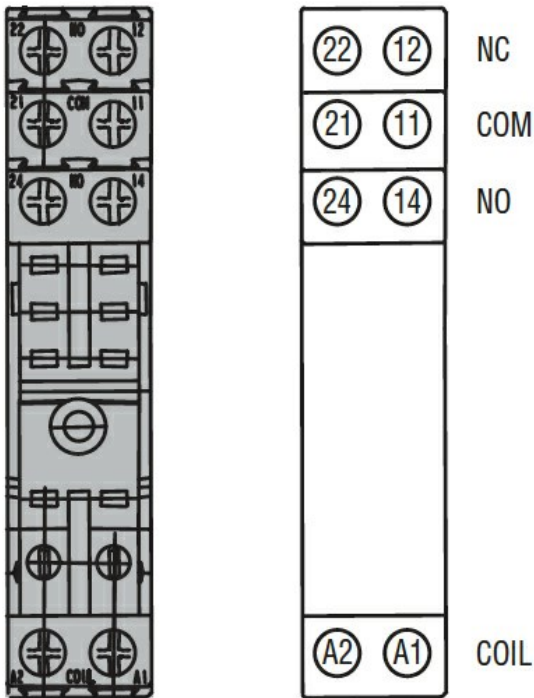

Certifications and compliance

Compliance

IEC/EN 61810

Certificates

CSA

cURus

EAC

ETIM classification

ETIM 8.0

EC001456 -
 Relay socket