




Product designation	SOCKET
Product type designation	HR1X
Contact characteristics	
B	 o-o


Contact characteristics		
Rated insulation voltage Ui IEC/EN	V	250
Rated impulse withstand voltage Uimp		4
Coil characteristics		
Relay control voltage + socket	V	220 240VAC/DC
Mechanical features		
Fixing		On 35mm DIN rail

## **Dimensions**

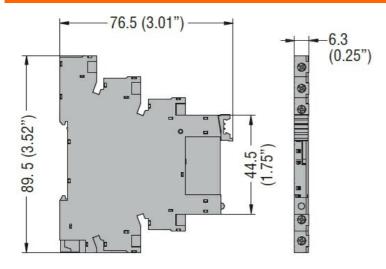

Wiring diagrams



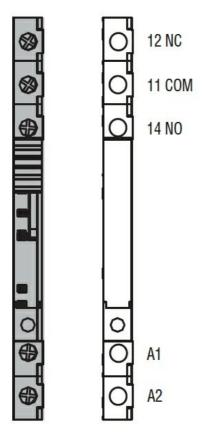

Certifications and compliance				
Compliance				
	IEC/EN 61810			
Certificates				
	CSA			
	cURus			
	EAC			
FTIM classification	n			

EC001456 -ETIM 8.0 Relay socket