
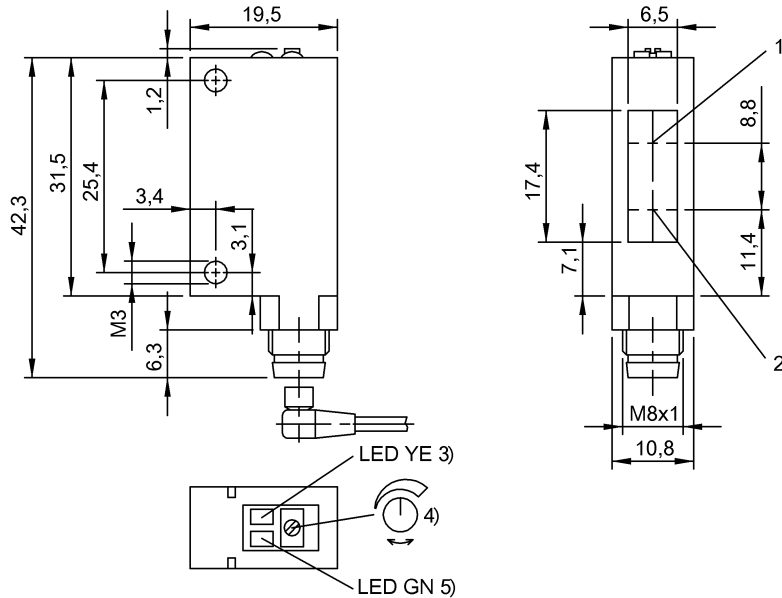


BOS 5K-PS-ID10-S75
Ordering code: BOS0124

Diffuse sensor
 Series 5K
 Working Range: 0...900 mm

PNP (1x), NO (pin 4)
 Infrared
 DC, direct current

BALLUFF
sensors worldwide



1) Optical axis receiver, 2) Optical axis emitter, 3) Output function, 4) Sn, 5) Stability

Characteristic data

Operating voltage	10...30 V DC
Connection	Connector, M8x1-S75
Switching freq. f max.	500 Hz
Indicator	Stability - LED GN
Setting	Switching distance (Sn)
Adjuster	Potentiometer 270° (1x)
Short-circuit protected	yes
Protected against polarity reversal	yes
Enclosure Type per IEC 60529	IP67

Optical data

Principle of optical operation	Light scanner, energetic
Switching function, optical	NO: light-on
Light type	Infrared

Electrical data

Rated operating voltage Ue DC	24 V
Effective operating current Ie	100 mA
Ripple max. (% of Ue)	8
Switching output	PNP (1x)
Switching function	NO (pin 4)
Turn-off delay toff max.	1 ms
Turn-on delay ton max.	1 ms
No-load current max. Io at Ue	30 mA

Voltage drop Ud max. (at Ie) 1,2 V

Mechanical data

Eff. switching distance Sr	900 mm
Capture range Sd	0...900 mm
Beam characteristic	Divergent
Range Sn	Sn = 900 mm, adjustable
Minimum operating distance	0 mm
Connector type	M8x1-S75
Sensing surface material	PC
Housing material	PC, PBT
Mounting type	Screw M3
Design	Block, 90° connection
Ambient temperature	-25...55 °C

Basic data

Basic standard IEC 60947-5-2
 The sensor is functional again after the overload has been eliminated.
 Reference object (target): Gray card, 200 x 200, 90 % remission, axial approach.
 Only for NFPA 79 applications (machines with a supply voltage of maximum 600 volts). Device shall be connected only by using any R/C (CYJV2) cord, having suitable ratings.
 For additional information, refer to user's guide.
 Order accessories separately.



BOS 5K-PS-ID10-S75
Ordering code: BOS0124

Diffuse sensor
Series 5K
Working Range: 0...900 mm

PNP (1x), NO (pin 4)
Infrared
DC, direct current

BALLUFF
sensors worldwide

