



Monoblock buzzer
- Continuous or pulse tone
LPCZS

Product designation

Product type designation

General characteristics

Material	Polyamide
IEC degree of protection	IP40 on front and IP20 on rear

Electrical characteristics

Rated impulse withstand voltage U _{imp}	kV	4
Rated frequency	Hz	50-60
Supply voltage (AC)	V	9...15
Supply voltage (DC)	V	9...15

Mechanical features

Tightening torque for terminals max	Nm	0.5
Screwdriver	Flat-head: 0.6x3.5mm/0.02x0.	

Conductor section

AWG/kcmil conductor section	min	24
	max	14
IEC	min	mm ² 0.5
	max	mm ² 2.5

Weight	g	20
--------	---	----

UL technical data


UL degree of protection	1, 2, 3R, 4, 4X, 12, 12K on front
-------------------------	-----------------------------------

Ambient conditions


Temperature

Operating temperature	min	°C	-25
	max	°C	+70
Storage temperature	min	°C	-40
	max	°C	+85

Dimensions

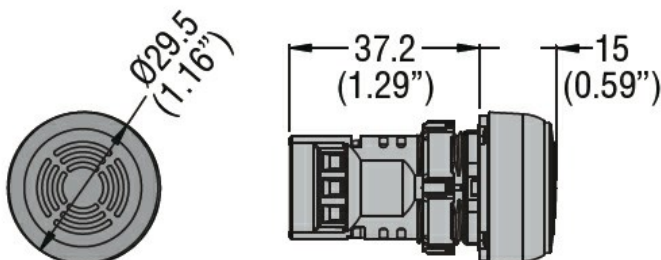

Wiring diagrams

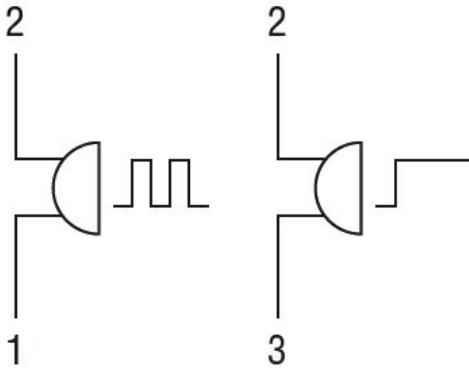

Certifications and compliance

Compliance

IEC/EN 60947-1
IEC/EN 60947-5-1

Certificates

cULus