


# TP-206KK1-CF-H1141-L150 Temperature Detection – Probe

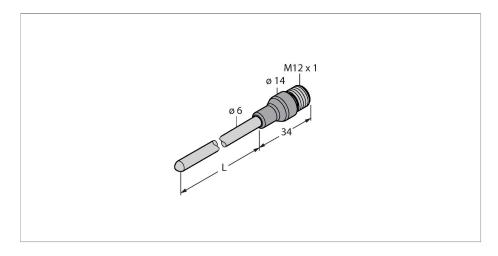


### Technical data

Туре	TP-206KK1-CF-H1141-L150
Ident. no.	100017084
Temperature range	
Measuring range	-401100 °C
Temperature operating range	-402012 °F
Accuracy	class 1
Measuring element	thermocouple type K, DIN EN 60584 and IEC 584
Immersion depth (L)	150 mm
Protection type and class	IP67
Output function	2-wire
Ambient conditions	
Ambient temperature	-40+85 °C
Storage temperature	-40+85 °C
Housing	
Housing material	Metal/plastic, Inconel 600/Nylon
Sensor material	Metal, Inconel 600
Process connection	For compression fittings, thermowell or direct mounting
Electrical connection	Connectors, M12 × 1
Reference conditions acc. to IEC 61298-1	
Temperature	15+25 °C
Atmospheric pressure	8601060 hPa abs.
Humidity	4575 % rel.
Auxiliary power	24 VDC
	<del></del>

### **Features**

- ■Thermocouple acc. to DIN EN 60584
- ■Vibration an shock-resistant
- Can be connected to TS720, IM34 or IME-
- ■Max. temperature connector: 120 °C
- ■2-wire technology
- Process connection: Compression Fitting
- Bendable probe (min. bending radius: 3x outside diameter)

## Wiring diagram



## Functional principle

Thermocouples are used for the detection and monitoring of temperatures to optimize and control a process.

Typical applications are in machine and plant construction as well as in the process industry. The core element of the temperature sensor is a pair of metallic conductors made of different materials, which are connected at one end. Due to the thermoelectric effect, the thermocouple provides a temperature-dependent voltage.

# Accessories

### CF-M-6-G1/4-A4


### 9910483

Compression fitting for direct mounting of temperature sensors; sensor diameter 6 mm; process connection G1/4" male thread

CF-M-6-N1/4-A4

### 9910484

Compression fitting for direct mounting of temperature sensors; sensor diameter 6 mm; process connection 1/4" NPT male thread



### CF-M-6-M18-A4

### 9910525

Compression fitting for direct mounting of temperature sensors; sensor diameter 6 mm; process connection M18 × 1 male thread




N1/2"

ø 6,1

### 9910529

Compression fitting for direct mounting of temperature sensors; sensor diameter 6 mm; process connection 1/2" NPT male thread



### CF-M-6-G1/2-A4

### 9910530

Compression fitting for direct mounting of temperature sensors; sensor diameter 6 mm; process connection G1/2" male thread

