


SUITABILITY	FEATURES / BENEFITS
<ul style="list-style-type: none"> Compressed Air 	<ul style="list-style-type: none"> Light and flexible Low friction hose Excellent resistance to oil, solvent and other non-aqueous solutions Excellent recoil ability and crimp resistance Long service life with outstanding ageing qualities Excellent abrasion resistance

SPECIFICATIONS	
Temperature range	-30°C to +60°C
Pressure rating	Values given are based on the short term burst pressure of CEJN Spiral hose at 20°C using a 3:1 safety factor. NOTE: Any increase in temperature above 20°C will result in a decline in the working pressure values.
Construction	Ester based, non-braided polyurethane.




CEJN – SPIRAL
2 3/4" MANDREL SIZE

285

PART NUMBER	Ø	Ø	Ø	Ø
C19958B5820	5.0	8.0	2	10
C19958B5840	5.0	8.0	4	10
C19958B5860	5.0	8.0	6	10
C19958B5880	5.0	8.0	8	10

3 3/8" MANDREL SIZE

C19958B6020	6.5	10.0	2	10
C19958B6040	6.5	10.0	4	10
C19958B6060	6.5	10.0	6	10
C19958B6080	6.5	10.0	8	10



CEJN – SPIRAL
4 1/4" MANDREL SIZE

285

PART NUMBER	Ø	Ø	Ø	Ø
C19958B6220	8.0	12.0	2	10
C19958B6240	8.0	12.0	4	10
C19958B6260	8.0	12.0	6	10
C19958B6280	8.0	12.0	8	10


6 1/4" MANDREL SIZE

C19958B6620	11.0	16.0	2	10
C19958B6640	11.0	16.0	4	10
C19958B6660	11.0	16.0	6	10
C19958B6680	11.0	16.0	8	10

SPIRAL ANTI-SPARK POLYURETHANE TUBE

SUITABILITY	FEATURES / BENEFITS
<ul style="list-style-type: none"> Welding environments Assembly lines, fixed workplaces Breathing air applications 	<ul style="list-style-type: none"> Low friction hose Spark and scorch resistant Excellent resistance to oils, solvents and other non-aqueous solutions Long service life with outstanding ageing qualities Excellent recoil ability

SPECIFICATIONS	
Temperature range	-30°C to +60°C
Pressure rating	Values given are based on the short term burst pressure of CEJN Spiral Anti-spark hose at 20°C using a 3:1 safety factor. NOTE: Any increase in temperature above 20°C will result in a decline in the working pressure values.
Construction	Ester based polyurethane.
Applicable standards	EN14594:2005 when used with approved breathing air filters.

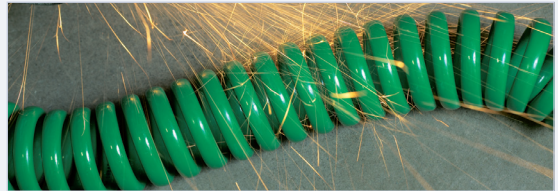

CEJN – SPIRAL HOSE
3 3/8" MANDREL SIZE

285

PART NUMBER	Ø	Ø	Ø	Ø
C199584020	6.5	10.0	2	10
C199584040	6.5	10.0	4	10
C199584060	6.5	10.0	6	10
C199584080	6.5	10.0	8	10

4 1/4" MANDREL SIZE

C199584220	8.0	12.0	2	10
C199584240	8.0	12.0	4	10
C199584260	8.0	12.0	6	10
C199584280	8.0	12.0	8	10