


## Accessories: Signal adapter BOS S-F02

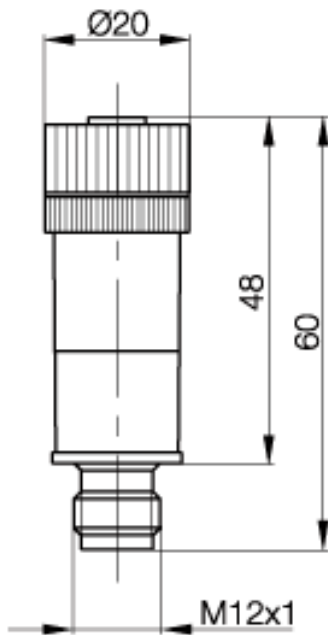

PX1583a

### Common Data

Version  
Usable with  
turn-off delay, NPN

Signal adapter  
Programmable timer for turn-on and

### Mechanical Data


Measurements WxHxD or Dia x D  
Material  
Weight  
Protection class per IEC 60529  
Mounting

Ø20 x 60mm  
PBT/PA 6.6  
15gg  
IP67IP  
plugged

### Electrical Data

Supply voltage

10...30 DCV



Datasheet number::

Definitions see general catalog.  
If not otherwise noted, ratings according to  
IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH  
P.O.Box 1160  
73761 Neuhausen Germany  
Phone (07158) 173-0 Fax (07158) 5010

Datenblatt by CD-ROM - 10/2004

**BALLUFF**