Power Feed Module

Features


- Interface for Power Bus
- Supply current 3 A
- · LED status indication
- · Connection via screw terminals

Function


The power feed module interfaces 24 V DC power to the Power Bus at a maximum current of 3 A.

Depending on the power consumption up to 75 devices can be supplied via the power feed module.

The device displays the status of the power by a green LED. The device displays a reverse polarity by a red LED.

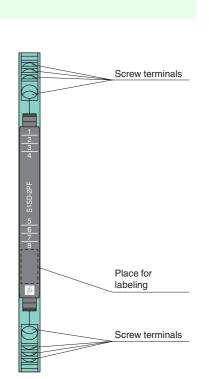

Connection

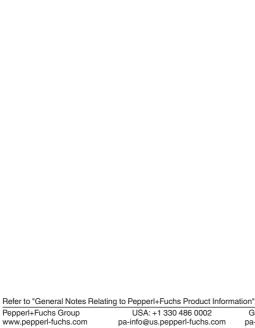

Germany: +49 621 776 2222 pa-info@de.pepperl-fuchs.com

7+

8-

Singapore: +65 6779 9091 pa-info@sg.pepperl-fuchs.com

Power Bus

24 V DC

S1SD-2PF



24 V DC

Zone 2 Div. 2

2-



Front view

Supply		
Connection		Power Bus or terminals 1-, 2+; 7+, 8-
Rated voltage	U _r	16.8 31.2 V DC
Fusing		4 AT with back-up fuse
Power dissipation		0.8 W
Output		
Supply		Output current: \leq 3 A , via Power Bus
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Degree of protection		IEC 60529:2001
Ambient conditions		
Ambient temperature		-25 70 °C (-13 158 °F)
Storage temperature		-40 85 °C (-40 185 °F)
Damaging gas		designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3
Mechanical specifications	6	
Connection type		screw terminals
Core cross-section		0.5 2.5 mm ² , 20 14 AWG
Degree of protection		IP20
Mass		approx. 70 g
Dimensions		6.2 x 97 x 107 mm (0.24 x 3.82 x 4.21 inch) , housing type S1
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
EU-Type Examination Certif	icate	DEMKO 16 ATEX 1750X
Marking		🐼 II 3G Ex nA IIC T4 Gc
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013, EN 60079-15:2010
International approvals		
UL approval		E106378
IECEx approval		IECEx UL 16.0116X
Approved for		Ex nA IIC T4 Gc
General information		
Supplementary information		Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com.
Accessories		
Optional accessories		Power Bus POWERBUS-SETL5.*** Power Bus POWERBUS-SETH5.*** cover for DIN mounting rail POWERBUS-COV.250 end cap POWERBUS-CAP

Refer to "General Notes Relating to Pepperl+Fuchs Product Information". Pepperl+Fuchs Group www.pepperl-fuchs.com

USA: +1 330 486 0002 pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222 pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091 pa-info@sg.pepperl-fuchs.com

