


# Temperature measuring amplifier

## 1-channel

### IM34-14EX-CDRi

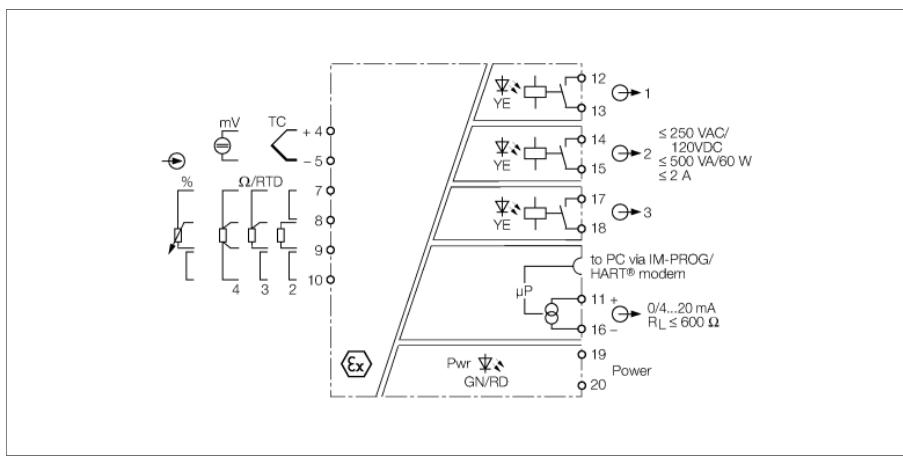

The 1-channel Ex-temperature measuring amplifier IM34-14Ex-CDRi is designed to evaluate the temperature-dependent changes of Ni100/Pt100 resistors and thermocouples types B, E, J, K, L, N, R, S, T and to output them as temperature-linear current signals 0/4...20 mA. Furthermore, resistors, potentiometers or low voltages can be mapped linearly as current signals in a range between -160...+160 mV.


The device features one output for analog signals 0/4...20 mA and three outputs for limit value relays. The measured value can be viewed on a 2-line display.

The measured value is permanently written to a ring memory with space for 8000 values. The writing process is stopped with a predefined trigger event, like for example "limit value exceeded". After that, the stored signal sequence can be read out.

The device can be parametrized and configured via PC (FDT / DTM). For this, connect the device to the PC via the 3.5 mm jack at the front (the matching transmission cable IM-PROG III can be ordered separately from TURCK). In addition, a basic scope of parameters can be set via buttons and display at the front as well as via the HART® capable power interface

The signals are transformed according to ITS 90/IEC 584 for thermocouples and IEC 751 for Pt100 RTDs and provided as temperature-linear signals at the current output.

Cold junction compensation of thermocouples is either realized via an externally connected Pt100/Ni100 resistor, via temperature measured inside the amplifier or via an individually adjustable constant temperature value.

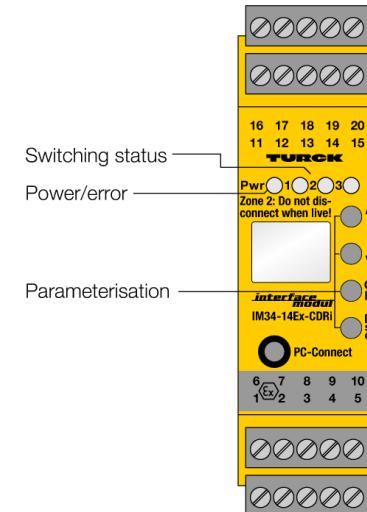


- ATEX, IECEEx, FM, GOST
- Installation in zone 2
- Parametrized via PC (FDT / DTM), front-panel switch or HART®
- Ring memory for up to 8000 measured values
- Display
- Input for Pt100/ Ni100 resistors, variable resistors, thermocouples and millivolt signals
- Complete galvanic isolation


**Temperature measuring amplifier  
1-channel  
IM34-14EX-CDRI**

Type code	IM34-14EX-CDRI
Ident no.	7506634
Flammability class acc. to UL 94	V-0
Operating voltage	20...250 VAC
Frequency	40...70 Hz
Operating voltage range	20...125 VDC
Power consumption	≤ 3 W
<b>Input circuits</b>	intrinsically safe acc. to EN 60079 thermocouple Ni100 Pt100 mV signals Pt100 Ni100 Probe current Thermoelements Potentiometer input Nominal resistance Voltage input
Pt100	(IEC 751), 2, 3 and 4-wire technology
Ni100	(DIN 43760), 2, 3 and 4-wire technology
Probe current	≤ 0.2 mA
Thermoelements	B, E, J, K, N, R, S, T (ITS 90/IEC 584), L (DIN 43710)
Potentiometer input	
Nominal resistance	0...1.5 kΩ
Voltage input	-0.160...+0.160 VDC
<b>Output circuits</b>	0/4...20 mA Load resistance current output Fault current Output circuits (digital) Relay switching voltage Switching current per output Switching capacity per output Switching frequency Contact quality Output
Output current	0/4...20 mA
Load resistance current output	≤ 0.6 kΩ
Fault current	0 / 22 mA adjustable
Output circuits (digital)	3 x relays (NO)
Relay switching voltage	≤ 250 VAC/120 VDC
Switching current per output	≤ 2 A
Switching capacity per output	≤ 500 VA/60 W
Switching frequency	≤ 10 Hz
Contact quality	AgNi, 3µ Au
Output	adjustable output mode
<b>Rise time (10-90%)</b>	≤ 1000 ms
Dropout time (90...10%)	≤ 1000 ms
Reference temperature	23 °C
Accuracy current output	± 5 µA
Temperature drift analogue output	0.0025 %/K
Temperature drift RTD input	± 3 mΩ/K
Temperature drift TC input	3.2 µV / K (of 320mV)
Accuracy RTD input	± 50 mΩ
Accuracy TC input	± 15 µV
Cold junction compensation error	2-wire < 100mΩ after line compensation 3-wire < 100mΩ with asymmetrical wiring 4-wire < 50mΩ with cold junction compensation
<b>Galvanic isolation</b>	
Test voltage	2.5 kV


**Dimensions**



**Load curve**

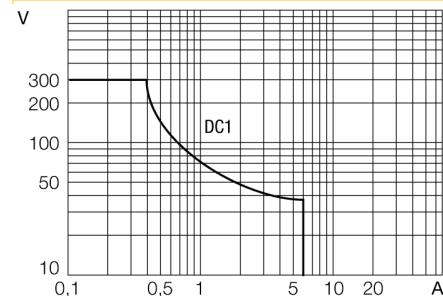

**Output relay electrical lifetime**

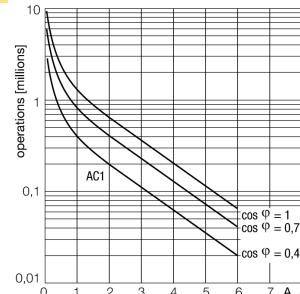

**Temperature measuring amplifier**  
**1-channel**  
**IM34-14EX-CDRI**

<b>Ex approval acc. to conformity certificate</b>	TÜV 05 ATEX 2877		
Application area	II (1) GD		
Protection type	[EEx ia] IIC		
Max. values:	terminal connection: 4...10		
Max. output voltage U <sub>o</sub>	≤ 5 V		
Max. output current I <sub>o</sub>	≤ 9 mA		
Max. output power P <sub>o</sub>	≤ 11 mW		
Characteristic	linear		
Rated voltage	250 V		
Internal inductance/capacitance L/C <sub>i</sub>	Li = 75 µH, Ci negligibly small		
External inductance/capacitance L/C <sub>e</sub>			
<b>Ex approval acc. to conformity certificate</b>	TÜV 05 ATEX 2889 X		
Application area	II 3 G		
Protection type	EEx nA nC [nL]		
Max. values:	terminal connection: 4...10		
Max. output voltage U <sub>o</sub>	≤ 5 V		
Max. output current I <sub>o</sub>	≤ 9 mA		
Max. output power P <sub>o</sub>	≤ 11 mW		
Characteristic	linear		
Internal inductance/capacitance L/C <sub>i</sub>	Li = 75 µH, Ci negligibly small		
External inductance/capacitance L/C <sub>e</sub>			
<b>MTTF</b>	150 years acc. to SN 29500 (Ed. 99) 40 °C		
<b>Indication</b>			
Operational readiness	green		
Switching state	yellow		
Error indication	red		
<b>Protection class</b>	IP20		
Ambient temperature	-25...+70 °C		
Storage temperature	-40...+80°C		
Relative humidity	≤ 95%		
Dimensions	104 x 27 x 110 mm		
Weight	250 g		
Mounting instruction	For mounting on DIN rail or mounting panel		
Housing material	polycarbonate/ABS		
Electrical connection	4 x 5-pole removable terminal blocks, reverse polarity protected, screw connection		
Terminal cross-section	1 x 2.5 mm <sup>2</sup> / 2 x 1.5 mm <sup>2</sup>		
Tightening torque	0.5 Nm		

## Accessories

Type code	Ident no.	Description	Dimension drawing
IM-CC-5X2BU/2BK	7504031	Cage clamp terminals for IM modules (Ex devices; width 27 mm): 2 blue/2 black, 5-pin	
IM-PROG III	7525111	The programming adapter IM-PROG III is used for parametrization of TURCK IM and IMB devices via FDT/DTM and for galvanic separation.	