





- Universal AC input I Full range (up to 305VAC)
- Built-in active PFC function
- High efficiency up to 95%
- Protections: Short circuit I Over current I Over voltage I Over temperature
- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 I IP65 design for indoor or outdoor installations
- Type HL LED Driver for use in Class I, Division 2 hazardous location luminaires
- Three in one dimming function (1-10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry I damp I wet location
- 7 years warranty (Note.10)











320W Single Output Switching Power Supply













HLG-320H-12 ₩

Blank: IP67 rated. Cable for IIO connection.

A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.

B: IP67 rated. Constant current level adjustable through output cable with 1-10Vdc or PWM signal or resistance.


SPECIFICATION MODEL

PECIFICA MODEL	TION	HLG-320H-12	HLG-320H-15	HLG-320H-20	HLG-320H-24	HLG-320H-30	HLG-320H-36	HLG-320H-42	HLG-320H-48	HLG-320H-54				
							_	_		٠				
-	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V				
_		6 ~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V				
_	RATED CURRENT	22A	19A	15A	13.34A	10.7A	8.9A	7.65A	6.7A	5.95A				
	RATED POWER	264W	285W	300W	320.16W	321W	320.4W	321.3W	321.6W	321.3W				
<u> </u>	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	250mVp-p	250mVp-p	250mVp-p	350mVp-p				
,	VOLTAGE ADJ. RANGE Note.6		13.5 ~ 17V	17 ~ 22V	21 ~ 26V	26 ~ 32V	32 ~ 39V	38 ~ 45V	43 ~ 52V	49 ~ 58V				
	CURRENT ADJ. RANGE	11 ~ 22A	ed by internal po 9.5 ~ 19A	otentiometer A 7.5 ~ 15A	type and C type	5.35 ~ 10.7A	4.45 ~ 8.9A	3.8 ~ 7.65A	3.35 ~ 6.7A	2.97 ~ 5.95				
_	VOLTAGE TOLERANCE Note.3	±3.0%	±2.0%	±1.5%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%				
SUITOUT	LINE REGULATION	±0.5%	±2.0% ±0.5%	±1.5%	±1.0%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%				
-	LOAD REGULATION		±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
<u> </u>		±2.0%				l .	⊥0.3%	⊥0.5%	⊥0.3%	⊥0.5%				
-		2500ms,80ms/115VAC 500ms,80ms/230VAC at full load 15ms at full load 230VAC /115VAC												
	HOLD UP TIME (Typ.)	90 - 305VAC 127 - 431VDC												
<u> </u>	VOLTAGE RANGE Note.5 FREQUENCY RANGE	90 - 305VAC 127 - 431VDC 47 - 63Hz												
<u> </u>														
	POWER FACTOR (Typ.) TOTAL HARMONIC DISTORTION	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.94/277VAC at full load (Please refer to "Power Factor Characteristic" curve) THD< 20% when output loading ≥ 50% at 115VAC/230VAC input and output loading ≥ 75% at 277VAC input												
<u> </u>		91%	92.5%	93.5%		94%	94.5%	95%	95%	95%				
	EFFICIENCY (Typ.) (230Vac) EFFICIENCY (Typ.) (277Vac)				94%									
	AC CURRENT (Typ.)	91.5% 93% 94% 94.5% 94.5% 95%												
	INRUSH CURRENT(Typ.)													
		COLD START 70A((width=1010 µ s measured at 50% lpeak) at 230VAC												
•	MAX. No. of PSUs on 16A CIRCUIT BREAKER	1 unit (circuit breaker of type B) / 2 units (circuit breaker of type C) at 230VAC												
	LEAKAGE CURRENT	<0.75mA / 277VAC												
	OVER CURRENT Note.4	95 ~ 108% Protection type : Constant current limiting, recovers automatically after fault condition is removed Hiccup mode, recovers automatically after fault condition is removed												
:	SHORT CIRCUIT													
PROTECTION	OVER VOLTAGE	14 ~ 17V												
-		Protection type : Shut down and latch off o/p voltage, re-power on to recover Shut down and latch off o/p voltage, re-power on to recover												
	OVER TEMPERATURE			· ·	er on to recove	r								
-	WORKING TEMP.	-40 ~ +70 °C (Refer to "Derating Curve")												
<u> </u>	WORKING HUMIDITY	20 ~ 95% RH non-condensing												
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 1												
	TEMP. COEFFICIENT	±0.03%/℃ (,											
,	VIBRATION			•	2min. each alon	•								
	SAFETY STANDARDS Note.7					!-13 independe	nt, IP65 or IP6	7 (except for H	LG-320H C typ	e), J61347-1,				
				-320H C type)										
	WITHSTAND VOLTAGE				P-FG:1.5KVAC									
CAFFTV & -	ISOLATION RESISTANCE				OVDC / 25℃/ 7									
MC.	EMC EMISSION							load) ; EN6100						
	EMC IMMUNITY					24, light industr	ry level (surge	1KV), criteria	В					
	MTBF	157.1K hrs mir		K-217F (25°C)										
OTHERS	DIMENSION	252*90*43.8mm (L*W*H)												
	PACKING	• •	16Kg/0.92CUF											
	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance: includes set up tolerance, line regulation and load regulation. 4. Please refer to "DRIVINO METHODS OF LED MODULE". 5. Derating may be needed under low input voltages. Please check the static characteristics for more details. 6. A type and C type only. 7. Safety and EMC design refer to EN60598-1, subject CNS15233, GB7000.1, FCC part18. 8. Length of set up time is measured at cold first start. Turning ONIOFF the power supply may lead to increase of the set up time. 9. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.													


- complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- 10. Refer to warranty statement.

 11. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently connected to the mains.




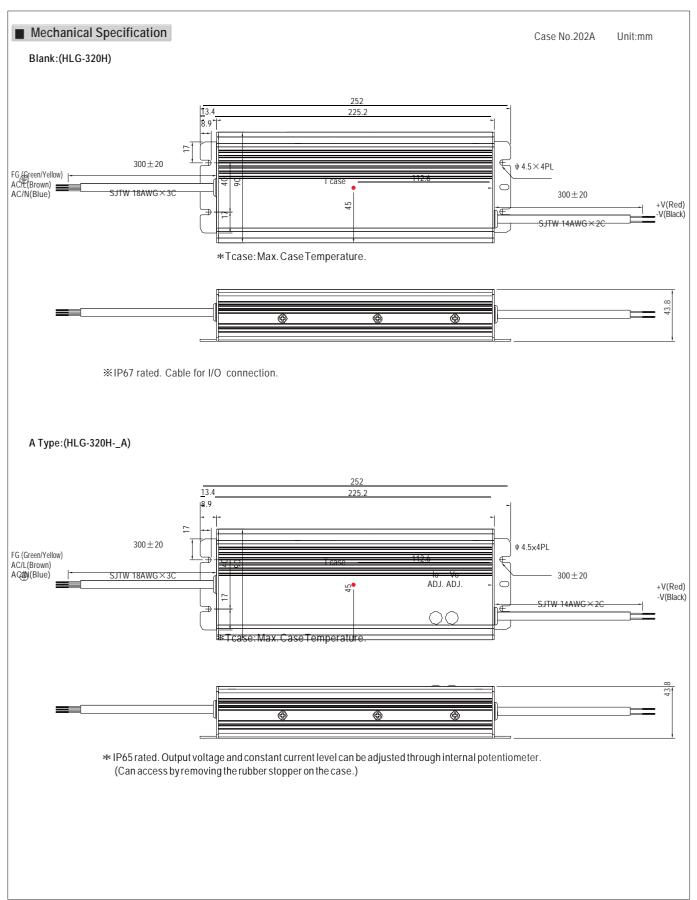



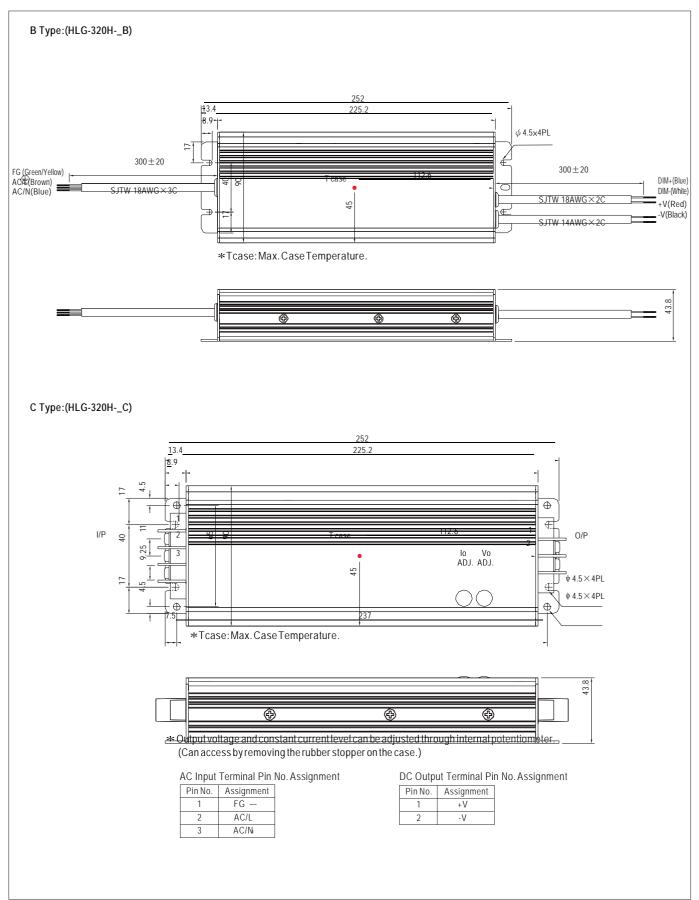




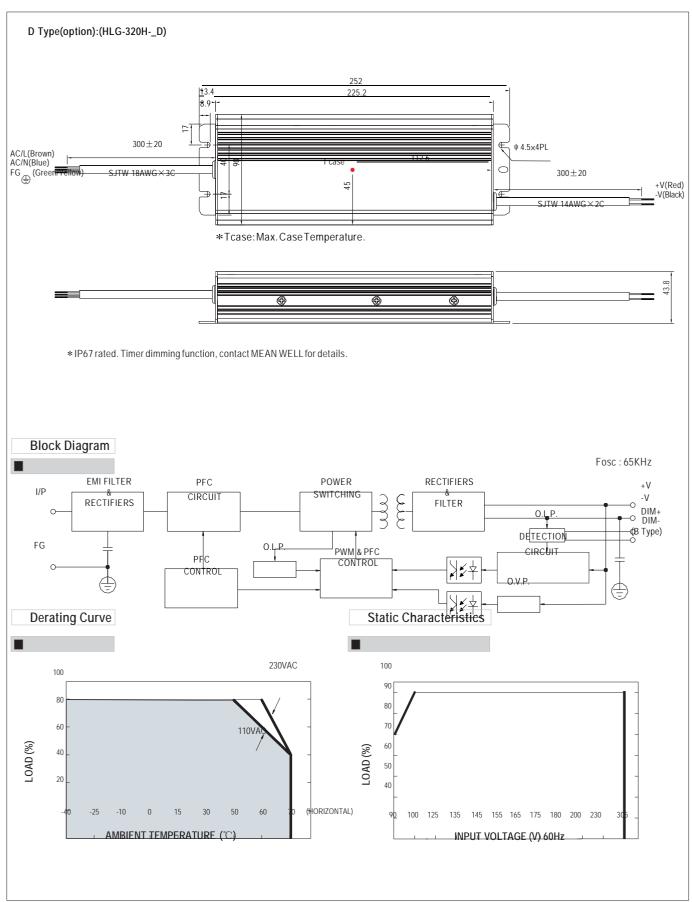




■ Power Factor Characteristic

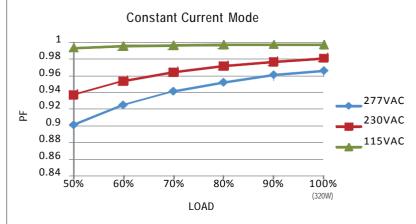

EFFICIENCY vs LOAD (48V Model)

HLG-320H series possess superior working efficiency that up to 95% can be reached in field applications.

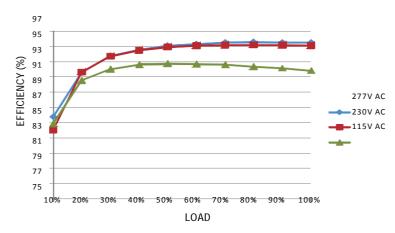


DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

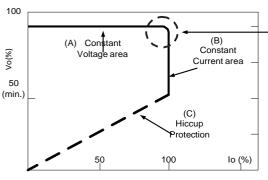


Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEANWELL.



■ DIMMING OPERATION (for B-type only)

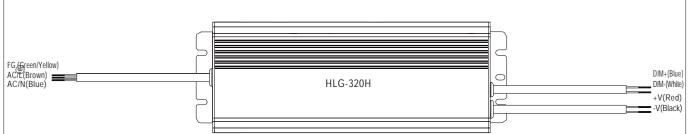

- ≯ Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.
- ★ Please DO NOT connect "DIM-" to "-V".
- * Reference resistance value for output current adjustment (Typical)

Resistance value	Single driver	10K Ω	20K Ω	30K Ω	40K Ω	50K Ω	60K Ω	70K Ω	80 K Ω	90K Ω	100K Ω	OPEN
	Multiple drivers	10K Ω /N	20K Ω /N	30K Ω /N	40K Ω /N	50K Ω /N	60K Ω /N	70K Ω /N	80K Ω /N	90K Ω /N	100K Ω/N	
Percentage	of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%
* 1 ~ 10V dimming function for output current adjustment (Typical)												
Dimming v	مايام	1\/	21/	31/	41/	51/	6\/	7\/	Ω۱/	01/	10\/	ODEN

Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%
Dimming value	IV	2 V	3 V	4 V	5 V	6 V	/ V	8V	90	100	OPEN


Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

**Using the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

*Direct connecting to LEDs is suggested, but is not suitable for using additional

drivers. Dimming connection diagram for turning the lighting fixture ON/OFF:


N FG L

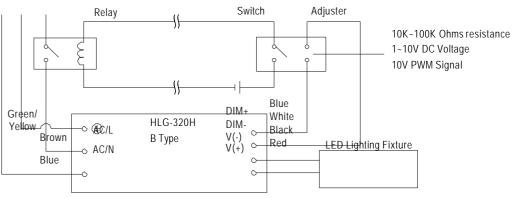

Using a switch and relay can turn ON/OFF the lighting fixture.

- 1.Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
- 2. The LED lighting fixture can be turned ON/OFF by the switch.



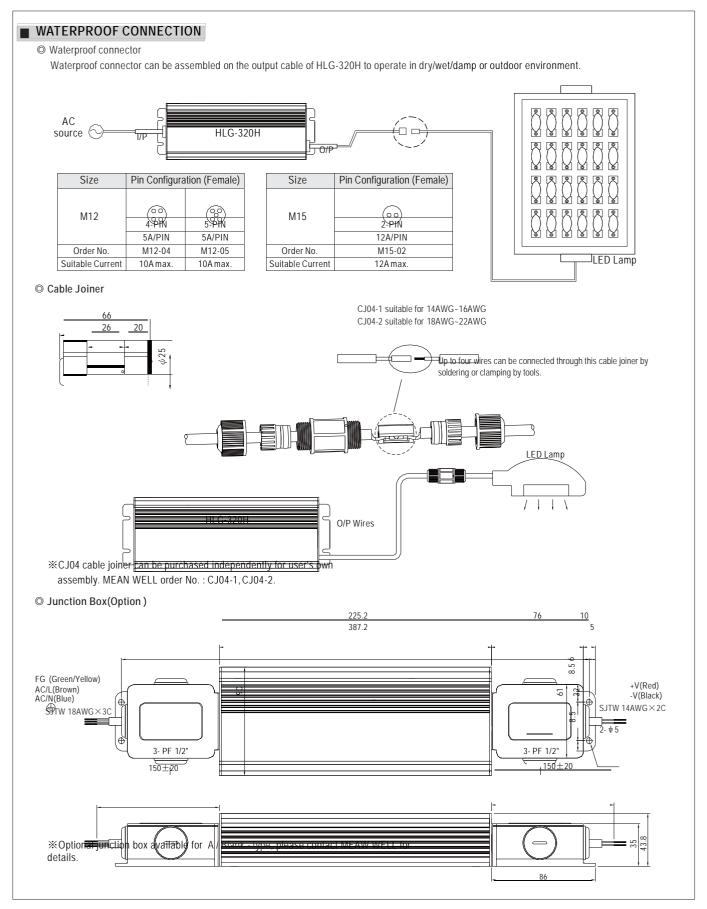



RS Part Number	Mean Well Part Number	RS Part Number	Mean Well Part Number
7381909	HLG-320H-12B	7382444	HLG-320H-12A
7381918	HLG-320H-15B	7382447	HLG-320H-15A
7381911	HLG-320H-20B	7382441	HLG-320H-20A
7381915	HLG-320H-24B	7382450	HLG-320H-24A
7381927	HLG-320H-36B	7382453	HLG-320H-30A
7381921	HLG-320H-42B	7382457	HLG-320H-36A
7381930	HLG-320H-48B	7382469	HLG-320H-48A